

MIRO TR 6.2MM FK OPTO-COUPLER MODULE

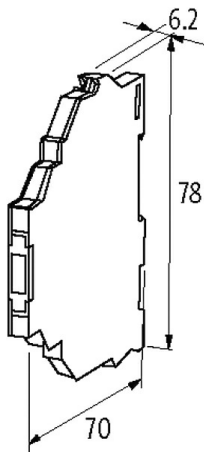
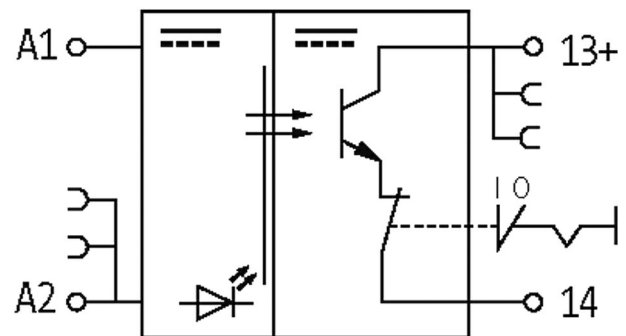
IN: 48 VDC - OUT: 48 VDC / 2 A

Transistor 2 A

48 V DC

Isolation function in output circuit

Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	78×6.2×70 mm

Output

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	1/5 ms
Saturation voltage (across output)	max. 0.3 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 10/1 Hz (resist./ind.)
Switching current per output	1 mA...2 A

Input

Control current	7 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...48 V DC
LED display	LED (yellow)

Commercial data

country of origin	CZ
customs tariff number	85414900
EAN	4048879021777
eClass	27371601
Packaging unit	1.000