

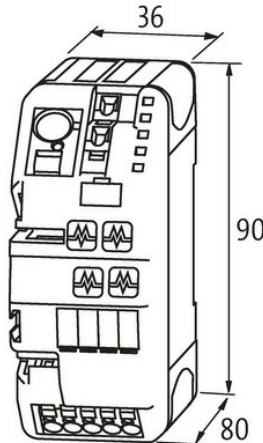
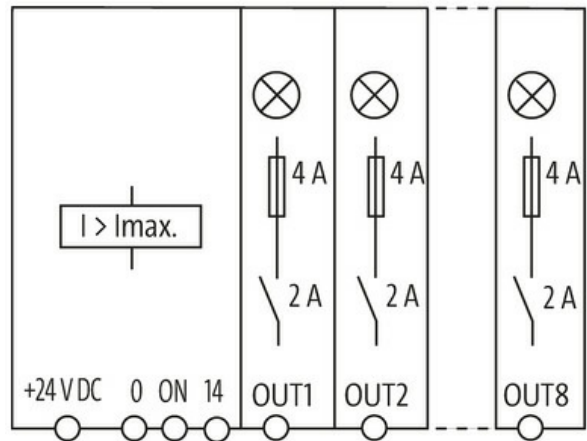
MICO BASIC 4.2 electronic circuit protection, 4 CHANNELS

IN: 24 V DC OUT: 24 V / 2 A

MICO BASIC 4.2

4 channels

Current adjustment 2 A

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

| | |
|-------------------|---|
| Mounting method | DIN-rail mountable TH35 (EN 60715) |
| Temperature range | 0...+55 °C (storage temperature -40...+80 °C) |
| Connection | Spring clamp terminals |
| Dimensions H×W×D | 90×36×80 mm |
| Bridging concept | one side, with spring clamp terminals or bridge set (max. 40 A) |
| Output terminals | per output 1 × 4 mm ² |
| Input terminals | 1 × 16 mm ² |

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Alarm terminals 2.5 mm²

Output

Inrush capacity max. 20 mF (per channel)

Current adjustment 2 A

Input

Operating voltage 24 V DC (18...30 V DC)

Control inputs

Input voltage (ON) 10...30 V DC

Impulse length (ON) min. 20 ms

Control outputs

Group alarm output max. 20 mA; high: all channels ON; low: not all channels ON

Commercial data

country of origin CZ

customs tariff number 85363010

EAN 4048879327145

eClass 27371802

Packaging unit 1.000