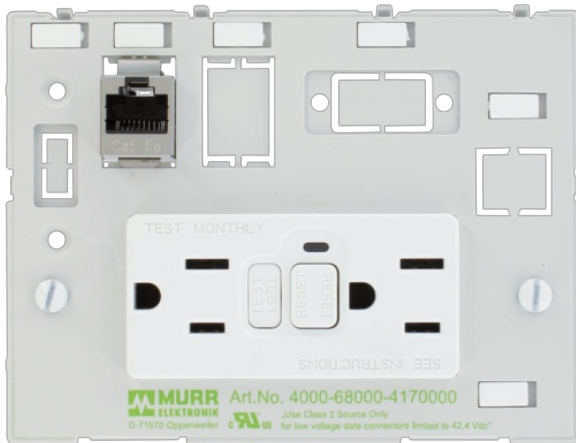


**MODLINK MSDD DBL COMBI INSERT USA 2XNEMA 5-15**

GFCI+1xRJ45 female/female

2× NEMA-GFCI 5-15 (screw terminals)  
 1× RJ45, 8-pole metal, CAT5e (female/female)  
 with touch protection

**[Link to Product](#)****Illustration**

Product may differ from Image

**General data**

Dimensions HxWxD	88x116x72 mm
------------------	--------------

**RJ45**

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

**USA**

Operating current	15 A
Operating voltage	125 V AC
No. of poles	2 + PE
Connection	Screw terminals: max. 2× 6 mm <sup>2</sup> (AWG 10)

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879463690
eClass	27189217
Packaging unit	1.000