


CUBE67 DIO8 E CABLE 2M

Expansion module
 DIO8 - 1.6 A (E) 2 m (open cable)
 With open ended wires
 Digital inputs/outputs (multifunctional)
 Connection cables are in the online shop under "Connection Technology".
 Housing fully potted.

[Link to Product](#)

Illustration

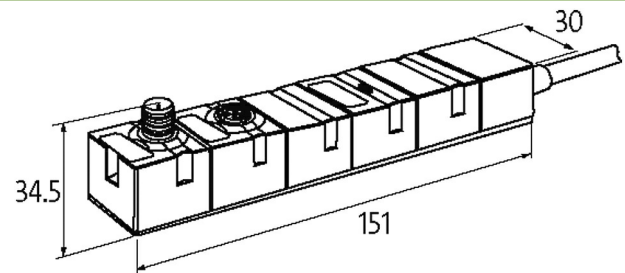

Product may differ from Image

General data

Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Protection	IP67
Dimensions HxWxD	150x30x34.5 mm

Output

Actuator supply UA	24 V DC (EN 61131-2), via system connection (max. 4 A)
Switching current per output	max. 60 mA (short-circuit and overload protected)

Input

Sensor supply US	24 V DC (EN 61131-2), max. 1.6 A
Type	for 3-wire sensors or mechanical switches, PNP
Input filter	1 ms

Cables

No./diameter of wires	10x 0.34 mm ²
Material (jacket)	PVC
Cable Length	2.0 m

Internal communication

LED display	US: sensor supply and internal supply voltage (green: OK); UA: actuator supply (green: OK)
Current consumption	max. 30 mA

Parameterization

I/O channels	Input/Output
--------------	--------------

Connections

Fieldbus	via internal system connection
Sensor-system/actuator supply	via internal system connection (max. 2x 4 A)
I/O ports	Open cable

Diagnostic

Communication status	via LED
Diagnostic via LED	per module
Diagnostic via BUS	per module and channel

Actuator warning	per channel via BUS
------------------	---------------------

Monitoring - under voltage	yes
----------------------------	-----

Monitoring - no voltage	yes
-------------------------	-----

Short-circuit and overload	yes
----------------------------	-----

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85444290
-----------------------	----------

EAN	4048879044905
-----	---------------

eClass	27242604
--------	----------

Packaging unit	1.000
----------------	-------