

7/8" male 0° field-wireable


Male straight

7/8" (3-pole)



Screw terminals

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

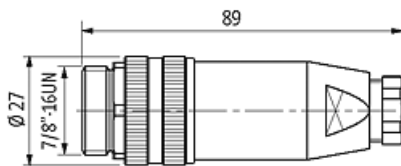[Link to Product](#)**Illustration**

Male

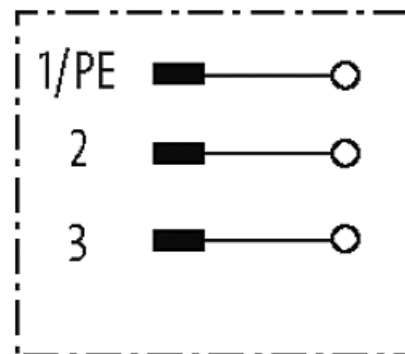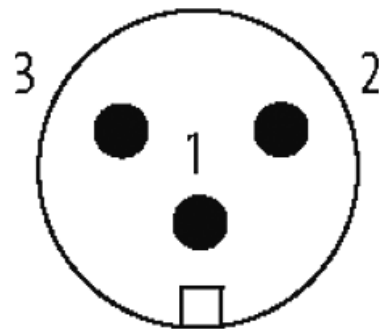

Product may differ from Image

**Form**

Form 78071

Technical Data

Operating voltage	max. 300 V AC/DC
Operating current per contact	12 A
Connection cross section	max. 1.5 mm ²
Sealing range (cable Ø)	6...8 mm
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)

General data

Temperature range -25...+85 °C

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879631433
eClass	27279218
Packaging unit	1