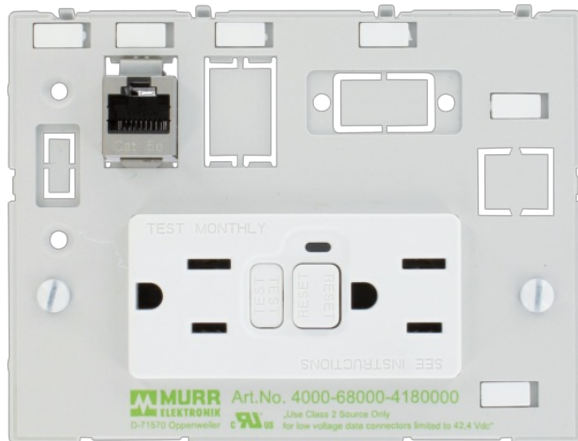


**MODLINK MSDD DBL COMBI INSERT**

USA 2XNEMA 5-15 GFCI + RJ45, without touch protection

2× NEMA-GFCI 5-15 (screw terminals)  
1× RJ45, 8-pole metal, CAT5e (female/female)

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Dimensions H×W×D	88×116×72 mm
------------------	--------------

**RJ45**

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

**USA**

Operating current	15 A
Operating voltage	125 V AC
No. of poles	2 + PE
Connection	Screw terminals: max. 2× 6 mm <sup>2</sup> (AWG 10)

**Commercial data**

country of origin	CN
customs tariff number	85366990
EAN	4048879843737
eClass	27189217
Packaging unit	1.000