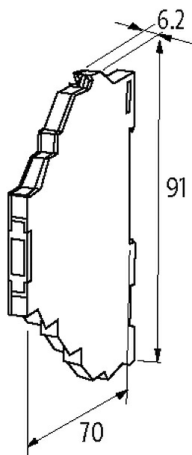
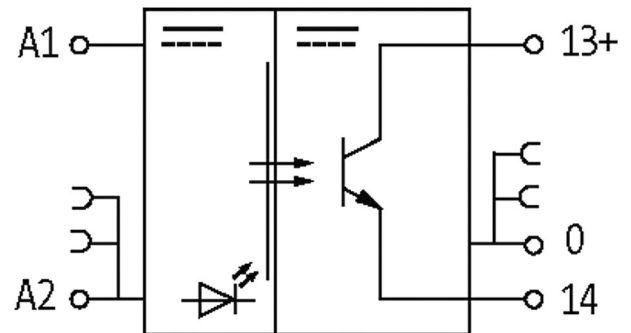


MIRO TR 24VDC FK 5P OPTO-COUPLER MODULE

IN: 48 VDC - OUT: 35 VDC / 2 A

Transistor 2 A
 24 V DC
 Short-circuit protected
 Switching frequency: max. 1 kHz
 Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	91x6.2x70 mm

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Output

Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	90/120 µs
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	10...35 V DC
Switching frequency	max. 1 kHz
Switching current per output	1 mA...2 A (short-circuit protected)

Input

Control current	6 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...48 V DC
LED display	LED (yellow)

Commercial data

country of origin	CZ
customs tariff number	85414900
EAN	4048879021852
eClass	27371601
Packaging unit	1.000