

M12 female 0° L-cod. field- wireable (IDC)5-pol. 0,75...1,5mm²

Female straight

The resistance to aggressive media should be individually tested for your application. Further details on request.

M12, 5-pole

L-coded

Field-wireable

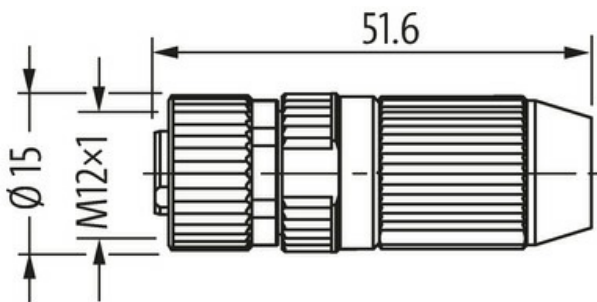
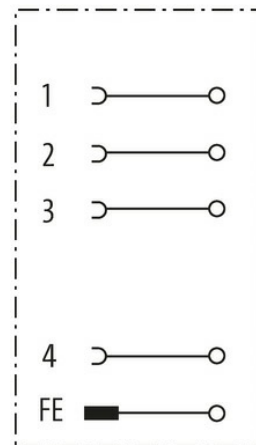
IDC terminals

0.75...1.5 mm²

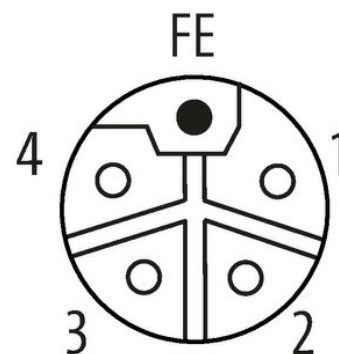
Sealing range (cable Ø)

5.8...13.5 mm

Plastic housings with good resistance against chemicals and oils.

[Link to Product](#)**Illustration**

Female



Product may differ from Image

Form

Form P4421

Technical Data

Operating voltage max. 63 V DC

Operating current per contact max. 12 A

Coding L-coded

Mating cycles	≥ 500
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Compression gland	M12 (SW17)
Connection cross section	max. 1.5 mm ²
Sealing range (cable Ø)	5.8...13.5 mm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Material	Zinc die casting
suitable for corrugated tube (internal Ø)	without

General data

Material (contact)	Copper
Material (contact surface)	Au
Temperature range	-40...+85 °C
Material (contact carrier)	PA
Dimensions H×W×D	53×25×25 mm

Commercial data

country of origin	RO
customs tariff number	85366990
EAN	4048879682558
eClass	27279221
Packaging unit	1.000