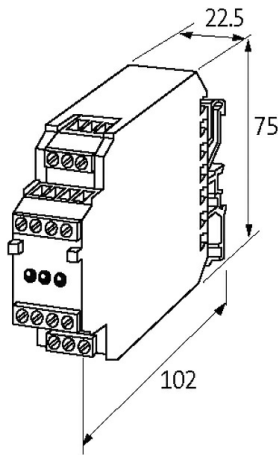
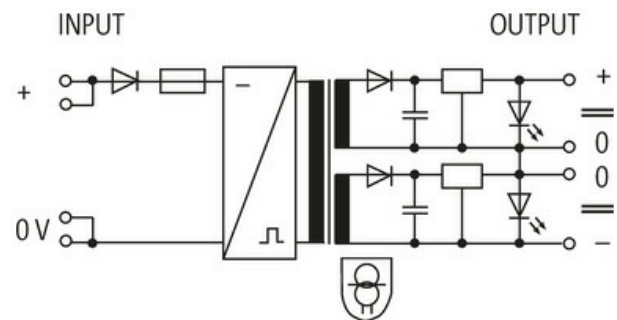


MDD DC/DC-CONVERTOR SWITCH MODE

IN: 24VDC OUT: 2x15V/0,25ADC

INPUT: 24 V DC
 OUTPUT: ± 15 V DC
 Output rating: 7 W
 Current: 2×0.25 A

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Standards	EN 61204-3
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	0...+50 °C, no condensation
Test isolation voltage	4 kV (input/output)

Output

Output voltage	± 15 V DC (SELV), $\pm 5\%$
Output fuse	short-circuit and overload protected, restart after overload by removing power supply
Output current	max. 2×250 mA
Ripple	max. 0.2% eff/rms

Input

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Input voltage	24 V DC
---------------	---------

Input current	0.85 A
---------------	--------

Input fuse (internal)	1.5 A (T)
-----------------------	-----------

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85043121
-----------------------	----------

EAN	4048879079518
-----	---------------

eClass	27210901
--------	----------

Packaging unit	1.000
----------------	-------