

## M12 ADAPTOR ON REAR OF MSUD VALVE PLUG FORM A 18MM

Form A (18 mm) – M12, connector at the rear

24 V AC  $\pm 20\%$  / DC  $\pm 25\%$

LED and suppression




3-pole

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link to Product](#)

#### Illustration

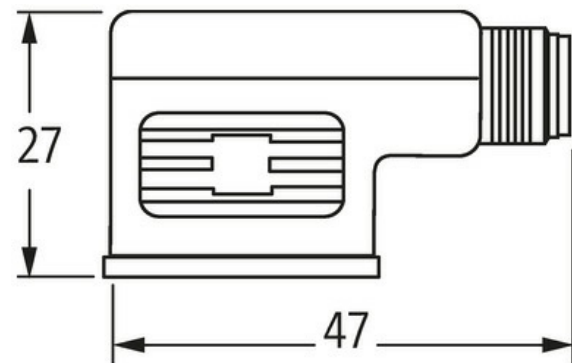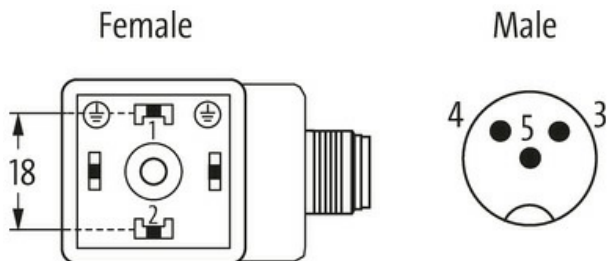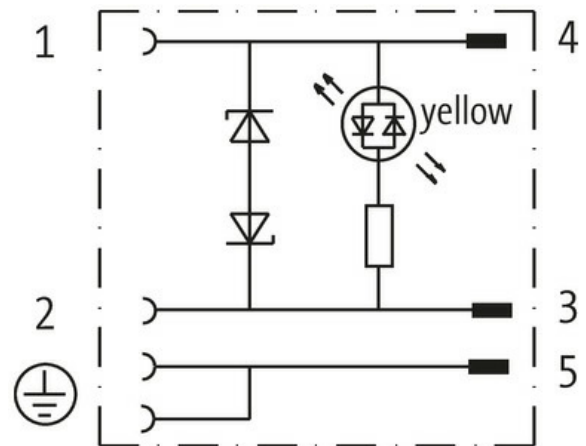

Depth: 27 mm

Product may differ from Image



#### Form

Form 41421

#### Technical Data

Operating voltage	24 V AC $\pm 20\%$ / DC $\pm 25\%$
Rated surge voltage	0.8 kV
Operating current per contact	max. 4 A

Locking of ports	M3/M12×1 mm (recommended torque 0.4/0.6 Nm)
------------------	---

Protection	IP67 inserted and tightened (EN 60529)
------------	--

Configuration	2 contacts + bridged PE
---------------	-------------------------

**General data**

Temperature range	-25...+85 °C
-------------------	--------------

**Commercial data**

country of origin	CZ
-------------------	----

customs tariff number	85366990
-----------------------	----------

EAN	4048879144629
-----	---------------

eClass	27143423
--------	----------

Packaging unit	1.000
----------------	-------