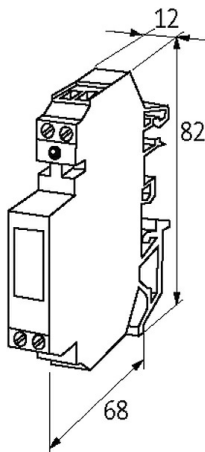
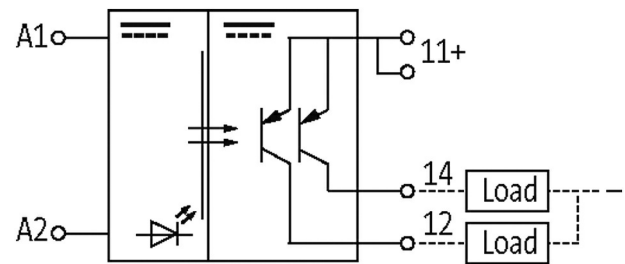


AMMDU OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 53 VDC / 1 A - 1 C/O contact

Transistor 1 A
24 V DC
with minus plug link
electr. NO/NC contact

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	12x82x68 mm

Output

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	25/75 µs
Saturation voltage (across output)	max. 0.5 V DC
Switching voltage	4.5...53 V DC

Switching frequency	max. 1 kHz/10 Hz (resist./ind.)
---------------------	---------------------------------

Switching current per output	1 mA...1 A
------------------------------	------------

Input

Voltage range OFF	0...6 V DC
-------------------	------------

Voltage range ON	10...53 V DC
------------------	--------------

LED display	LED (red)
-------------	-----------

Input current	10 mA
---------------	-------

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85414900
-----------------------	----------

EAN	4048879027960
-----	---------------

eClass	27371604
--------	----------

Packaging unit	1.000
----------------	-------