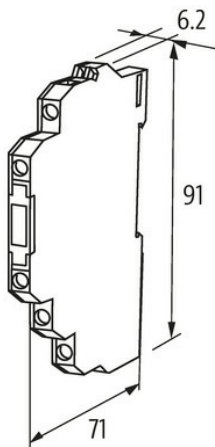
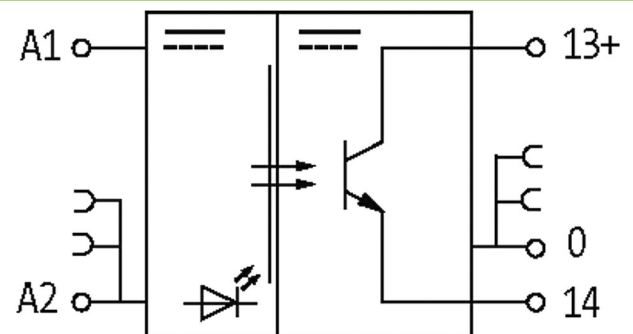


MIRO TR 24VDC SK 5P OPTO-COUPLER MODULE

IN: 48 VDC - OUT: 35 VDC / 2 A

Transistor 2 A
 24 V DC
 Short-circuit protected
 Switching frequency: max. 1 kHz
 Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	91×6.2×71 mm

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Output

Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	90/120 μ s
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	10...35 V DC
Switching frequency	max. 1 kHz
Switching current per output	1 mA...2 A (short-circuit protected)

Input

Control current	6 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...48 V DC
LED display	LED (yellow)

Commercial data

country of origin	CZ
customs tariff number	85414900
EAN	4048879026918
eClass	27371604
Packaging unit	1.000