

**xtremeDB passive module XDB-1-SIM**

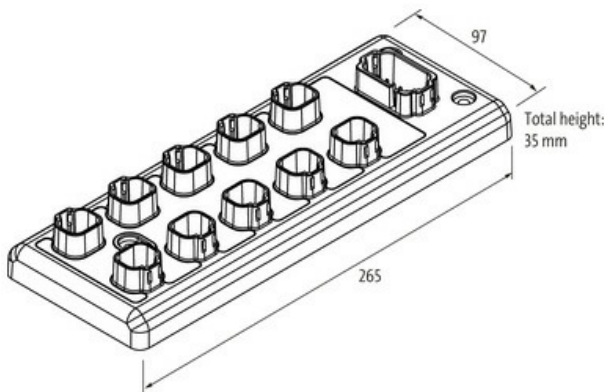
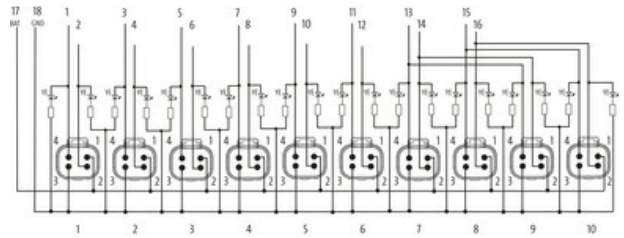
10x DT4P - 16 signal, sensor power

10-way, 4-pole, 16 signals


Plug connection DT-4P

IP69K (when using MDC xtreme connection cables)

Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)**Illustration**

Female  
male contacts



Product may differ from Image

**Technical Data**

Operating voltage	24 V DC (8...32 V DC)
Operating current per contact	max. 13 A
Protection	IP66K, IP67 inserted and tightened (EN 60529)
Housing	PA
Total current	max. 13 A

**General data**

Temperature range	-40...+80 °C
-------------------	--------------

**Contact Layout**

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
	Signal: yellow (PNP)

**Commercial data**

country of origin	US
-------------------	----

customs tariff number	85369010
EAN	89336773307
Packaging unit	1.000