


## Modlight Illumix Slim Line C8W

LED machine lamp, IP54, 24VDC, 2xM8 connection

Modlight Illumix Slim Line C  
8 W  
expandability

### Link to Product

#### Illustration

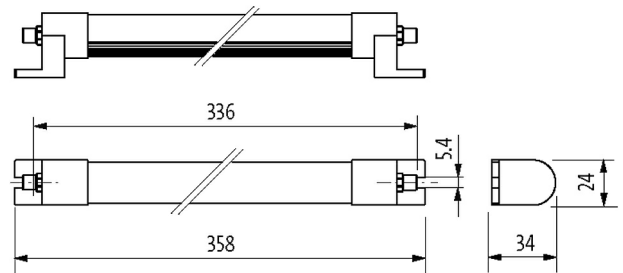

Product may differ from Image



#### Technical Data

Operating voltage	24 V DC (21.6...27.6 V DC)
No. of poles	4-pole
Coding	A-coded
Connection	M8 (male)
Luminaire light yield	approx. 105 lm/W
Luminaire light current	approx. 840 lm
Color reproduction (Ra)	> 80
Light color	Daylight white, approx. 5500 K
Lighting angle	> 120°
Input current	8 W

#### General data

Mounting method	rotatable
Temperature range	-30...+50 °C
Material (housing)	Anodized aluminum
Material (light cover)	Diffuse polystyrene (PS)
Installation altitude	Operation up to 2 000 m
Vibration stress	2...9 Hz/10 mm; 9...200 Hz/3 g
Screw head-Ø	max. 12 mm/M5
Relative humidity	5...95%
Protection	IP54
Dimensions H×W×D	34×358×24 mm (1.34×14.09×0.94 in)
Shock load	50 g, 11 ms

#### Commercial data

country of origin	DE
customs tariff number	94054239

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

EAN	4048879752282
eClass	27110306
Packaging unit	1.000