

T-COUPLER SLIMLINE(LED)M12-MALE 5P/2XM12-FEMALE 4P

T-coupler (Slim Line)

Male straight – females straight

M12 – M12

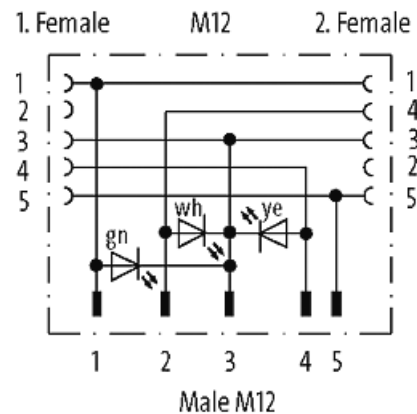
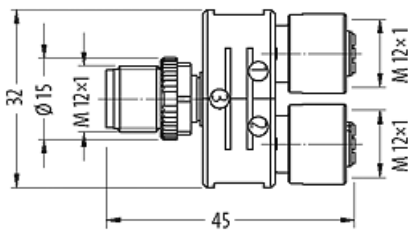
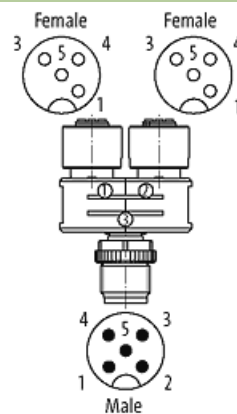
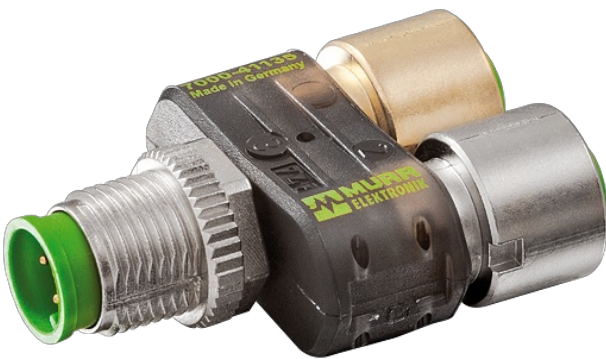
5-pole

3× LED (PNP)

Distribution function (NO)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Form**

Form 41135

Technical Data

| | |
|------------------------------------|-------------------|
| Operating voltage | 24 V DC \pm 25% |
| Operating voltage (only UL listed) | 30 V DC |
| Rated surge voltage | 0.8 kV |
| Operating current per contact | max. 4 A |

| | |
|------------------|--|
| Locking of ports | Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing |
| Protection | IP67 inserted and tightened (EN 60529) |

General data

| | |
|-------------------|--------------|
| Temperature range | -25...+85 °C |
|-------------------|--------------|

Commercial data

| | |
|-----------------------|---------------|
| country of origin | DE |
| customs tariff number | 85366990 |
| EAN | 4048879144858 |
| eClass | 27143423 |
| Packaging unit | 1 |