

MTS SINGLE-PHASE SAFETY TRANSFORMER

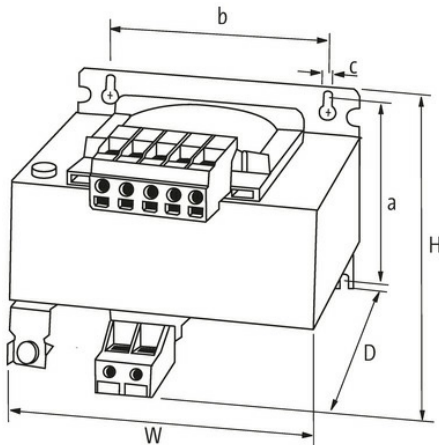
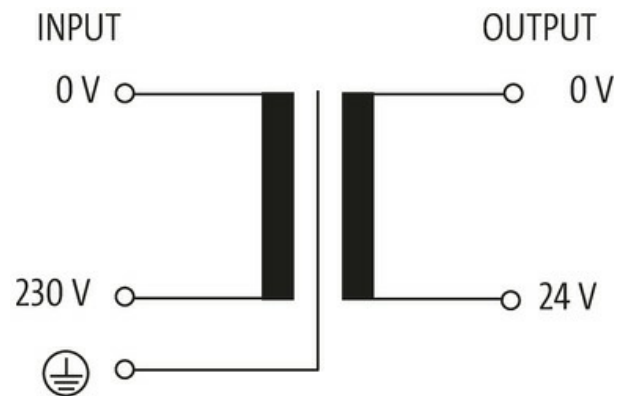
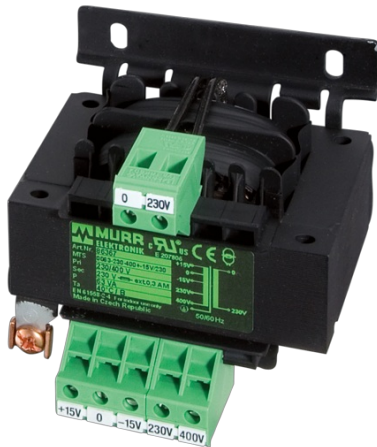
P:30VA IN:230VAC OUT:24VAC max. 26,3VAC

Single-phase - Control and Isolation Transformers

30 VA

Isolation class T 40/B

Other voltages on request.

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Standards	EN 61558-2-6, EN 62041 category 0
Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+35 °C (storage temperature -40...+80 °C)
Test isolation voltage	3.8 kV
Drill hole Ø	4.8×10 mm
Fixing centers a×b×c	56×56×4.8 mm
Dimensions H×W×D	92×79×93 mm

Output

Output voltage	24 V AC
Output rating	30 VA

Input	
Input voltage	230 V AC
Inrush current	0.8 A (230 V AC)
Short-circuit current	3.1 A (230 V AC)
Input current	0.15 A (230 V AC)
Frequency	50...60 Hz

Commercial data	
country of origin	CZ
customs tariff number	85043180
EAN	4048879328807
eClass	27031202
Packaging unit	1.000