


**Modlink MSDD-set: Frame 4000-68123-0000000,**  
insert 4000-68000-0090000 + 4000-68000-1210000

### [Link to Product](#)

#### Illustration

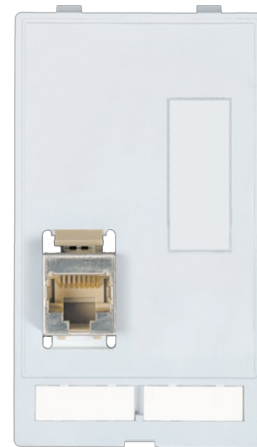

Product may differ from Image

| Frame                                     |   |
|---|---|
| suitable for mounting with wall thickness | 1...5 mm  |
| Protection                                | IP65  |
| Temperature range                         | -10...+60 °C (storage temperature -25...+60 °C)     |
| Housing                                   | Zinc die-casting, with surface finishing            |
| RJ45                                      |   |
| Operating current (UL Rating)             | max. 175 mA   |
| Locking of ports                          | Snap In   |
| Connection front side                     | RJ45  |
| Connection rear side                      | RJ45  |
| Operating voltage (UL Rating)             | max. 30 V AC/42.4 V DC                              |
| Specification                             | CAT5e, Class D, 100 MHz, (EN 50173-1)               |
| Australia                                 |   |
| Operating current                         | 15 A  |
| No. of poles                              | 2 + PE  |
| Operating voltage                         | 240 V AC  |
| Connection                                | Screw terminals: max. 2× 4 mm <sup>2</sup> (AWG 12) |
| Commercial data                           |   |
| country of origin                         | CZ  |
| customs tariff number                     | 85389099  |
| EAN                                       | 4048879378062                                       |
| eClass                                    | 27189217  |
| Packaging unit                            | 1.000   |