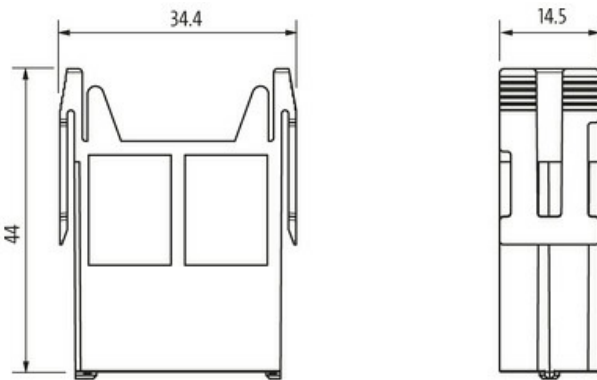
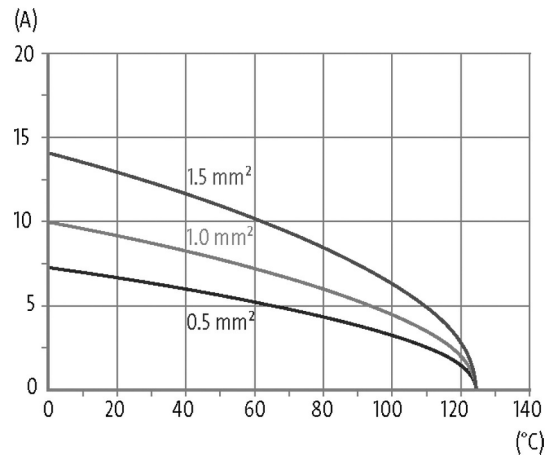


**Male module, 17-pole, crimp t.**

160 V, 10 A

Male  
17-pole  
Crimp

Technical data will be only guaranteed with Murrelektronik components.

**Link to Product****Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	160 V AC/DC
Rated surge voltage	2.5 kV
Operating current	10 A
No. of poles	17
Material group	I
Mating cycles	min. 500
Connection	Crimp
Connection cross section	0.14...2.5 mm <sup>2</sup> (AWG 26...13)
Holding force (contacts)	≥ 70 N
Insertion and withdrawal force	< 140 N
Isolation resistance	≥ 10 <sup>8</sup> Ω
Contact resistance	≤ 5 mΩ
Over voltage category	III

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Wire-Ø incl. isolation	max. 3.7 mm
Holding force (modules)	≥ 150 N

**General data**

Material (contact)	Brass
Material (contact surface)	Ag Au
Pollution Degree	3
Temperature range	-40...+125 °C
No. of module positions	1
Flammability class	V-0 (acc. to UL 94)
Type	Male
Climatic category	40/125/10
Material (module)	PA GF
Dimensions H×W×D	44×14.5×34.4 mm

**Cables**

Current load capacity	see derating curve
-----------------------	--------------------

**Commercial data**

country of origin	CZ
customs tariff number	85389099
EAN	4048879641579
eClass	27143424
Packaging unit	5.000