

**M12 male 0° self wireable screw term.**4-pol. 0,14 - 1,5mm<sup>2</sup>, 2,5-8mm cable diameter

Male straight

M12, 4-pole



Screw terminals

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Male

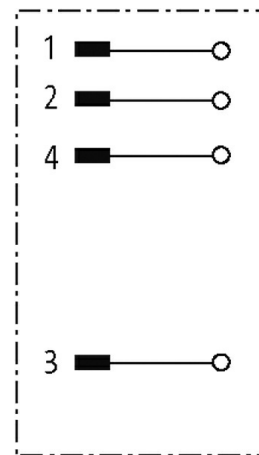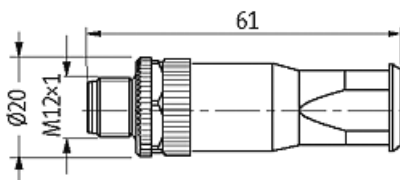

Product may differ from Image

**Technical Data**

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 7.5 A (+40 °C; 1.5 mm <sup>2</sup> )
Isolation resistance	≥ 100 MΩ
Connection cross section	0.14...1.5 mm <sup>2</sup>
Sealing range (cable Ø)	2.5...8.0 mm

Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm
Protection	IP67 mounted and tightened
Mating cycles	≥ 100

**General data**

Pollution Degree	3/2
Dimensions H×W×D	61×20×20 mm
Temperature range	-30...+85 °C

**Commercial data**

country of origin	CZ
customs tariff number	85366990
EAN	4048879839105
eClass	27279221
Packaging unit	1