


MIRO TH 24VDC FK L OPTO-COUPLER MODULE

IN: 50 VDC - OUT: 250 VAC / 0,5A



Triac 0.5 A
24 V DC
Spring clamp terminals

[Link to Product](#)

Illustration

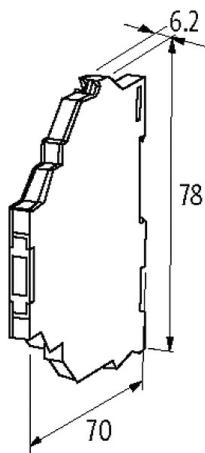

Product may differ from Image

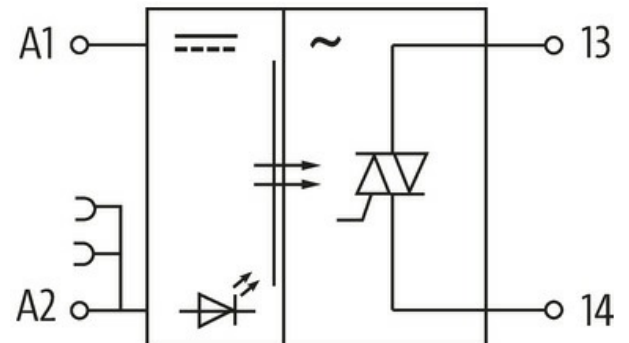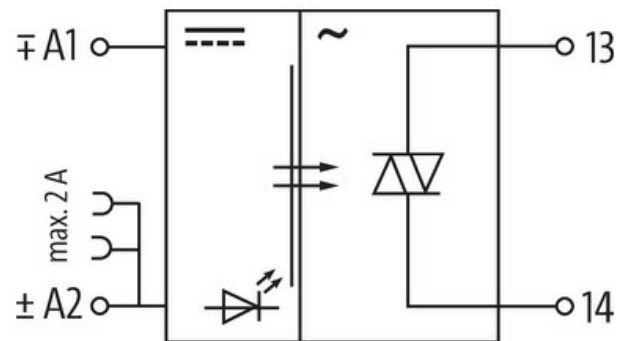

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

Output

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 1.5 V AC
Switching voltage	24...250 V AC
Switching frequency	max. 20 Hz, depending on suppression
Switching current per output	1.5 mA...0.5 A

Input

Control current	6 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...53 V DC
LED display	LED (yellow)

Commercial data

country of origin	CZ
customs tariff number	85414900
EAN	4048879021722
eClass	27371601
Packaging unit	1.000