



**M23 SERVO CABLE**

specification: 6FX8002-5CG01-1BJ0

Female straight  
 Plastic housings with good resistance against chemicals and oils.  
 M23, 6-pole  
 4-pole used  
 shielded  
 without brake wires  
 Power cable for SINAMICS S120 and Motors with M23 connection  
 Mounting bracket  
 without cable sleeves  
 Further cable lengths on request.

**[Link to Product](#)****Illustration**

Female

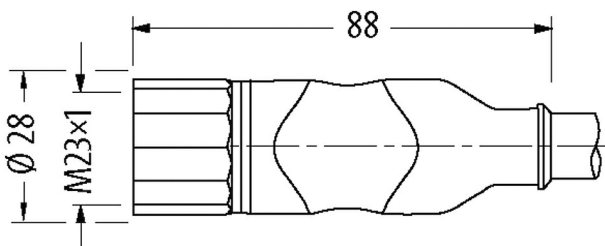

Product may differ from Image

**Form**

Form PS206

**Technical Data**

Operating voltage	max. 630 V AC/DC
Rated surge voltage	6.0 kV
Operating current per contact	Power cores: 12 A (1.5 mm <sup>2</sup> ), 15 A (2.5 mm <sup>2</sup> )
Material group	IEC 60664-1, category I
Locking of ports	Screw thread (M23×1 mm) recommended torque 2.0 Nm, self-securing
Compression gland	M23 (SW27)
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Locking material	Brass, nickel plated
Material	PUR
suitable for corrugated tube (internal Ø)	16 mm

General data	
Pollution Degree	3
Temperature range	-25...+85 °C, depending on cable quality
Cables	
Cable number	854
No./diameter of wires	(4G1.5+C)
Wire isolation	TPM (bk num, gnye)
C-track properties	10 Mio.
Torsion stress	±30°/m
Jacket Color	orange
Material (jacket)	PUR (UL/CSA) (=MC800+)
Specification	6FX8008-1BB11
Outer Ø	9.1 mm ±5%
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	7.5× outer Ø
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-30...+60 °C
Shield	yes
Approval (cable)	cURus (AWM-Style 21223/10492)
Commercial data	
country of origin	DE
customs tariff number	85444290
EAN	4048879781510
eClass	27279218
Packaging unit	1