

## M12 MALE ON TOP OF MSUD VALVE PLUG FORM BI 11MM

Form BI (11 mm) – M12, connector top entry

24 V AC  $\pm 20\%$  / DC  $\pm 25\%$

LED and suppression


3-pole

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.




### [Link to Product](#)

#### Illustration

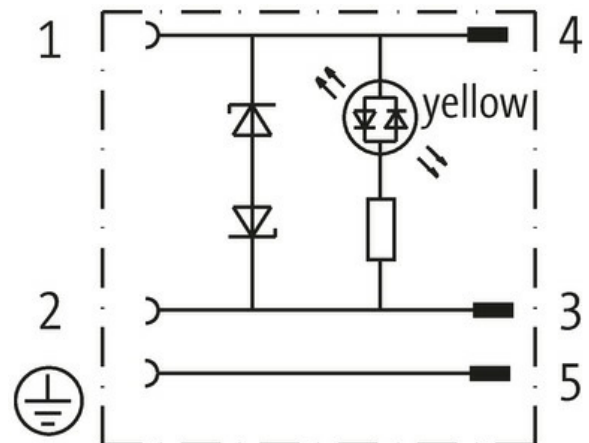

Female

Male

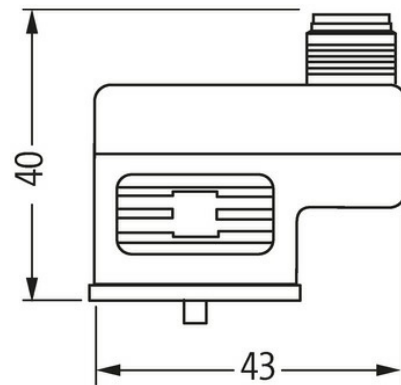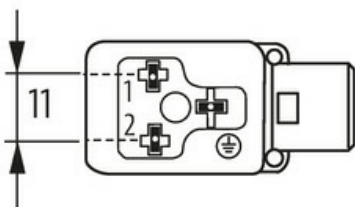

Depth: 22 mm

Product may differ from Image



#### Form

Form 42021

#### Technical Data

Operating voltage 24 V AC  $\pm 20\%$  / DC  $\pm 25\%$

Rated surge voltage 0.8 kV

Operating current per contact max. 4 A

Locking of ports	M3/M12×1 mm (recommended torque 0.4/0.6 Nm)
------------------	---

Protection	IP67 inserted and tightened (EN 60529)
------------	--

Configuration	2 contacts + PE
---------------	-----------------

**General data**

Temperature range	-25...+85 °C
-------------------	--------------

**Commercial data**

country of origin	CZ
-------------------	----

customs tariff number	85366990
-----------------------	----------

EAN	4048879143301
-----	---------------

eClass	27143423
--------	----------

Packaging unit	1.000
----------------	-------