



MTS 1-PHASE SAFETY TRANSFORMER

P: 250VA IN: 230/400VAC +/- 15VAC OUT: 24VAC

Single-phase safety transformer
250 VA
Isolation class T 40/B
Spring clamp terminals
Other voltages on request.

[Link to Product](#)

Illustration

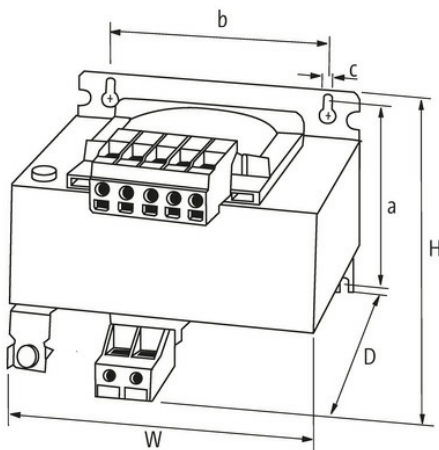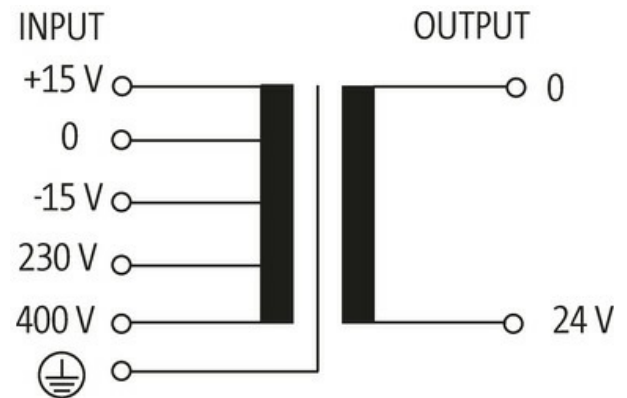

Product may differ from Image



General data

Standards	EN 61558-1, EN 61558-2-6, EN 62041 category 0
Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	4.8x8.4 mm

Fixing centers a×b×c	86.5×84×4.8 mm
----------------------	----------------

Dimensions H×W×D	102×96×108 mm
------------------	---------------

Output

Output voltage	24 V AC (SELV)
----------------	----------------

Output rating	250 VA
---------------	--------

Input

Input voltage	230/400 ±15 V AC
---------------	------------------

Inrush current	11.2 A (230 V AC); 6.45 A (400 V AC)
----------------	--------------------------------------

Short-circuit current	18.7 A (230 V AC); 10.7 A (400 V AC)
-----------------------	--------------------------------------

Input current	1.35 A (230 V AC); 0.78 A (400 V AC)
---------------	--------------------------------------

Frequency	50...60 Hz
-----------	------------

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85043180
-----------------------	----------

EAN	4048879065986
-----	---------------

eClass	27031302
--------	----------

Packaging unit	1.000
----------------	-------