


M12 MV insert shielded male snap / female

Insert - mobile housing
 Female straight – male straight
 M12, 5-pole
 A-coded



[Link to Product](#)

Illustration

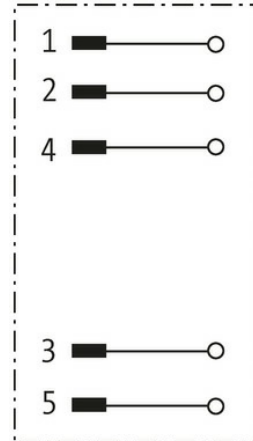

Male

Female

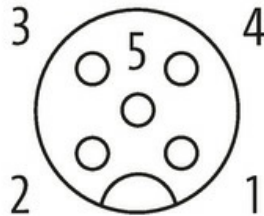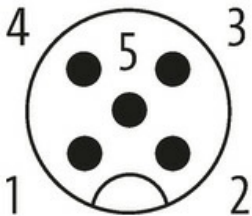

Product may differ from Image

Form

Form 42116

Technical Data

Operating voltage	49 V AC/DC
Operating current per contact	max. 4 A
Coding	A-coded
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Compression gland	M12
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Material	Brass, nickel plated

General data

Temperature range	-25...+85 °C
Test isolation voltage	1.5 kV
Gasket	FKM

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85366990
EAN	4048879562812
eClass	27260702
Packaging unit	1.000