MURR ELEKTRONIK
stay connected

Modlink MSDD-set: Frame 4000-68122-0000000,

insert 4000-68000-0250000 + 4000-68000-0010000

Link to Product

Illustration

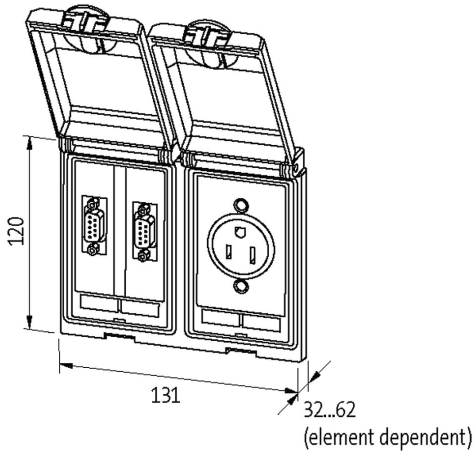

Product may differ from Image

Frame

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

suitable for mounting with wall thickness	1...5 mm
Protection	IP65
Housing	Zinc die-casting, KTL coated
Temperature range	-10...+60 °C (storage temperature -25...+60 °C)
SUB-D9	
Operating voltage	48 V AC/DC
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current	3 A
Operating current (UL Rating)	max. 175 mA
No. of poles	9-pole
Connection front side	SUB-D (female)
Connection rear side	SUB-D (female)
Locking of ports	UNC 4...40 bolt
Germany (VDE)	
Operating voltage	250 V AC
Operating current	16 A
No. of poles	2 + PE
Connection	Screw terminals: max. 2× 6 mm² (AWG 10)
LED display	yellow
Commercial data	
country of origin	CZ
customs tariff number	85366990
EAN	4048879035682
eClass	27189217
Packaging unit	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22