

7/8" FEMALE 0° FIELD-WIREABLE SCREW

5-pol. clamp section 10-12 mm

Female straight

7/8" (5-pole)




Screw terminals

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Female

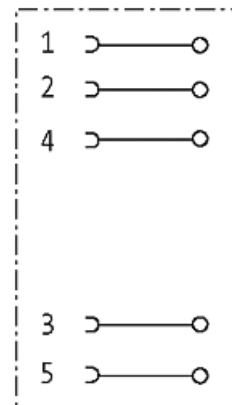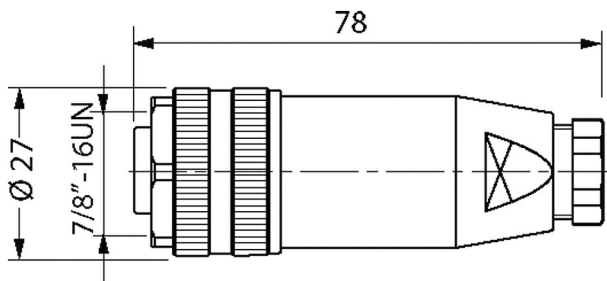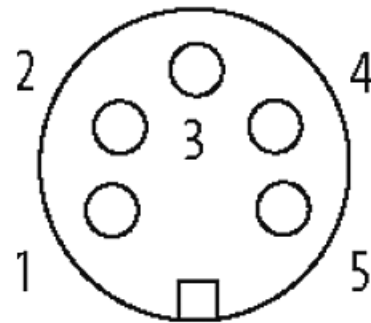

Product may differ from Image

**Form**

Form 78221

Technical Data

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 9 A
Connection cross section	max. 1.5 mm ²
Sealing range (cable Ø)	10...12 mm
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing

Protection	IP67 inserted and tightened (EN 60529)
------------	--

Locking material	Zinc die casting, matte nickel plated
------------------	---------------------------------------

General data

Temperature range	-25...+85 °C
-------------------	--------------

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85366990
-----------------------	----------

EAN	4048879134712
-----	---------------

eClass	27279218
--------	----------

Packaging unit	1
----------------	---