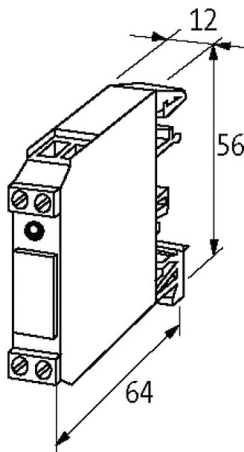
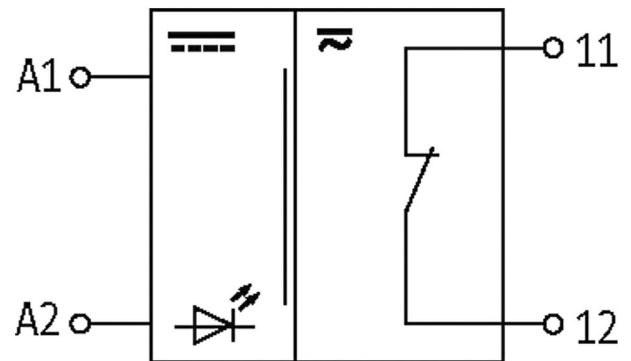


RMMR 11/230 AC OUTPUT RELAY

IN: 230 VAC/DC - OUT: 250 VAC/DC / 5 A

1 relay; 1 NC contact
 5 A
 230 V AC
 Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

General data

| | |
|------------------------|--|
| Mounting method | DIN-rail mountable TH35 or G32 (EN 60715) |
| Temperature range | -20...+60 °C |
| Test isolation voltage | 4.0 kV |
| Mech./ elect. life | 20 000 000 switching cycles/load dependent |
| Dimensions HxWxD | 56x12x65 mm |

Output

| | |
|--------------------------------------|----------------------|
| Min. load current | 100 mA |
| Contact material | Ag Ni 0.15 hv; Ag hv |
| Energize/release/contact bounce time | 10/15/1.5 ms |
| Switching voltage | max. 250 V AC/DC |

| | |
|----------------------------------|--------------------|
| Switching frequency | max. 10 Hz |
| Power rating (voltage dependent) | max. 1250 VA/240 W |
| Switching current per output | max. 5 A |

Input

| | |
|------------------------------|--|
| Connection voltage - current | 230 V AC/DC (195...250 V AC/DC) - 4 mA |
| LED display | LED (red) |

Utilization category

| | |
|-------|--|
| AC-15 | 3 A (24/110/230 V AC) |
| AC-12 | 5 A (24/110/230 V AC) |
| DC-13 | 1.5 A (24 V DC); 0.3 A (110 V DC); 0.15 A (230 V DC) |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85364900 |
| EAN | 4048879027458 |
| eClass | 27371001 |
| Packaging unit | 1.000 |