

## M23 SERVO CABLE

Specification: 6FX8002-5DA01-1EA0

Power cable with brake wires for SINAMICS S120 and motors with M23 connection and holding brake

Female straight – pre-wired terminals

M23, 6-pole  
shielded

Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

### Link to Product

#### Illustration



Female

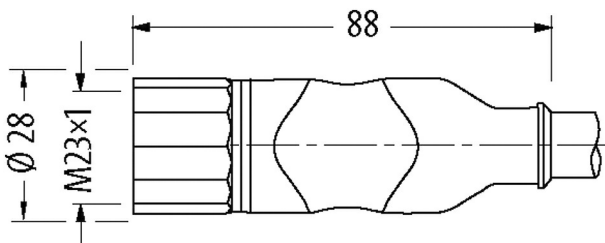

Product may differ from Image

#### Form

Form PS201

#### Technical Data

|   |  |
|---|--|
| Operating voltage                         | 600 V AC/DC (PIN 1/2/3/6); 250 V AC/DC (PIN 4/5)   |
| Rated surge voltage                       | 4 kV (PIN 1/2/3/6); 2 kV (PIN 4/5)   |
| Operating current per contact             | Power cores: 12 A (1.5 mm <sup>2</sup> ), 15 A (2.5 mm <sup>2</sup> ); brake cores: 5 A (1.5 mm <sup>2</sup> ) |
| Material group                            | IEC 60664-1, category I  |
| Locking of ports                          | Screw thread (M23×1 mm) recommended torque 2.0 Nm, self-securing   |
| Compression gland                         | M23 (SW27)   |
| Protection                                | IP65 and IP67 when plugged and screwed down (EN 60529)   |
| Locking material                          | Brass, nickel plated   |
| Material                                  | PUR  |
| suitable for corrugated tube (internal Ø) | 16 mm  |

#### General data

Pollution Degree 3

Temperature range -25...+85 °C, depending on cable quality

| <b>Cables</b>              |                                 |
|----------------------------|---------------------------------|
| Cable number               | 821                             |
| No./diameter of wires      | (4G1.5 + (2× 1.5)C)-C           |
| Wire isolation             | TPM (bk num, gnye)              |
| C-track properties         | 10 Mio.                         |
| Torsion stress             | ±30°/m                          |
| Jacket Color               | orange                          |
| Material (jacket)          | PUR (UL/CSA) (=MC800+)          |
| Specification              | 6FX8008-1BA11                   |
| Outer Ø                    | 11.6 mm ±5%                     |
| Bend radius (fixed)        | 5× outer Ø                      |
| Bend radius (moving)       | 7.5× outer Ø                    |
| Temperature range (fixed)  | -50...+80 °C                    |
| Temperature range (mobile) | -35...+70 °C                    |
| Shield                     | yes                             |
| Approval (cable)           | cURus (AWM-Style 21223/10492)   |
| Diameter (core)            | 4× 2.5 + 2× 1.5 mm <sup>2</sup> |
| <b>Commercial data</b>     |                                 |
| country of origin          | DE                              |
| customs tariff number      | 85444290                        |
| EAN                        | 4048879714181                   |
| eClass                     | 27279218                        |
| Packaging unit             | 1                               |