

**MIRO TR 24VDC 20KHZ IN<1MA OPTO-COUPLER MODULE**

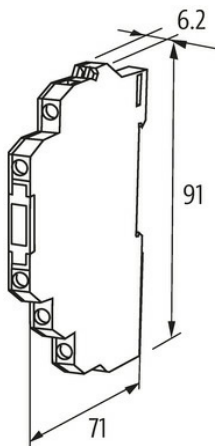
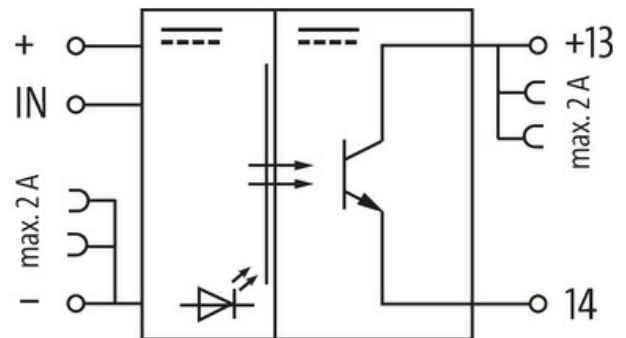
IN: 30 VDC - OUT: 48 VDC / 0.2 A

Transistor 0.2 A

24 V DC

Control current 0.1 mA (5 V DC)

Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	91×6.2×71 mm

**Output**

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	10/18 $\mu$ s
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 20 kHz
Switching current per output	0.1 mA...0.2 A

**Input**

Control current	0.1 mA (5 V DC)
Voltage range OFF	0...2 V DC
Voltage range ON	15...30 V DC
LED display	LED (yellow)

**Commercial data**

country of origin	CZ
customs tariff number	85414900
EAN	4048879026857
eClass	27371604
Packaging unit	1.000