

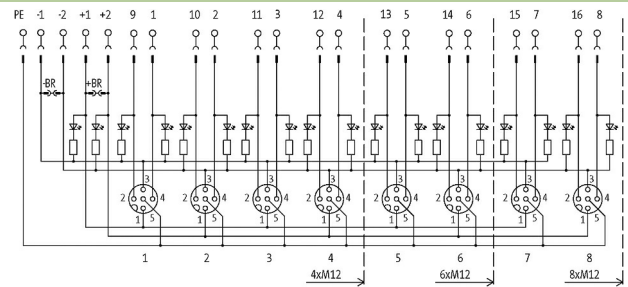


**MVP12, 8XM12, MOSA, PLUG. CAP SCT.**

With potent. sep.

pluggable connection cap  
 PIN 1: +24 V or PE selectable by plug links  
 Potential separation as option  
 with LED for digital PNP-signals 24 V DC  
 quick connection elements included  
 Further cable lengths on request.

**Link to Product****Illustration**

for 2 signals per port

Product may differ from Image

**Technical Data**

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Cap nut
Connection cross section	0.25...0.5 mm <sup>2</sup>
Protection	IP67 inserted and tightened (EN 60529)
Housing	Plastic, flame retardant
Signal per port	2
Total current	max. 2× 8 A

**General data**

Temperature range	-20...+80 °C
Dimensions H×W×D	43×50.2×170 mm

**Contact Layout**

PIN 1	(+)
-------	-----

PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
	LED (green): Power / LED (yellow): (S1/S2)

**Commercial data**

country of origin	DE
customs tariff number	85369010
EAN	4048879057646
eClass	27279219
Packaging unit	1.000