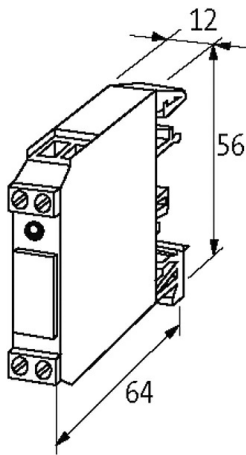
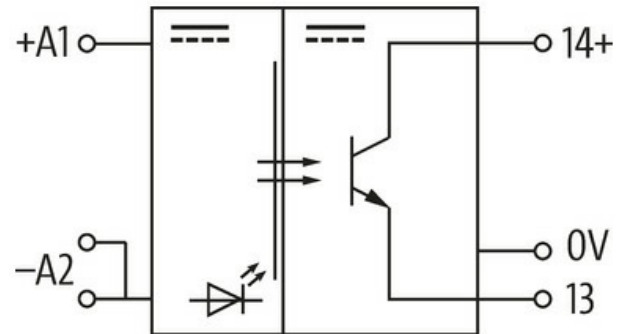


AMIS/10-44/2 OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 35 VDC / 2 A

Transistor 1.2 A
24 V DC[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	65x17x74 mm

Output

Leakage current (output is open)	max. 0.3 mA
Switching voltage	4.5...53 V DC
Switching frequency	max. 500 Hz (resist.) at max. 0.2 A/max. 30 Hz (ind.)

Input

Voltage range OFF	0...3 V DC
Voltage range ON	10...53 V DC

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

LED display	LED (red)
Input current	8 mA
Commercial data	
country of origin	CZ
customs tariff number	85414900
EAN	4048879027830
eClass	27371604
Packaging unit	1.000