

**EXACT12, 8XM12, 5-POLE, CAP, PLUG. SCREW TERM.**

Self wireable, no LED

8-way, 5-pole



without LED, up to 125 V AC/DC

Screw plug-in terminals



Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

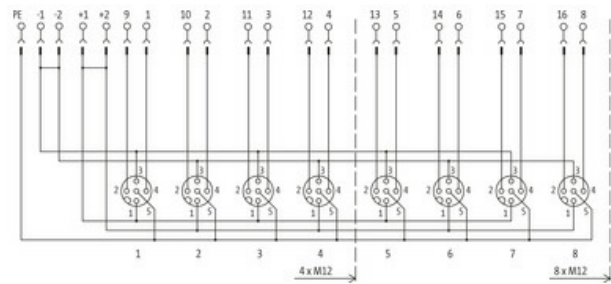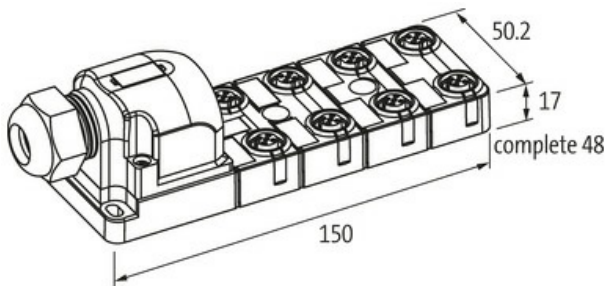[Link to Product](#)**Illustration**

M12 Females 5-pole

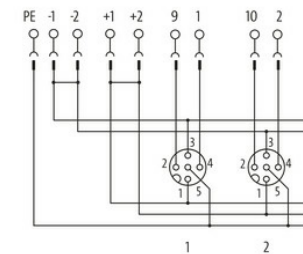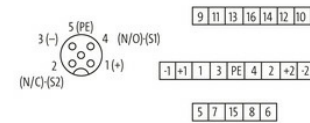

for 2 signals per port

Product may differ from Image

**Technical Data**

Operating voltage	125 V AC/DC
Operating current per contact	max. 4 A
Connection	Screw plug-in terminals: max. 1.5 mm <sup>2</sup> (AWG 16)
Protection	IP65/IP67
Housing	Plastic, flame retardant
Total current	max. 8 A

**General data**

Temperature range	-20...+70 °C
-------------------	--------------

**Contact Layout**

PIN 1	(+)
PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

PIN 5 (Earth)

**Commercial data**

country of origin	DE
customs tariff number	85369010
EAN	4048879053822
eClass	27143423
Packaging unit	1.000