

**M12 male 0° / M12 female 0° A-cod. shielded**

PUR 4x0.5+2x0.25 shielded gn UL/CSA+drag ch. 10.5m

Cube67

Male straight – female straight

M12 – M12, 6-pole

shielded

A-coded

Hybrid cable

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.


Further cable lengths on request.

**[Link to Product](#)****Illustration**

Male



Female

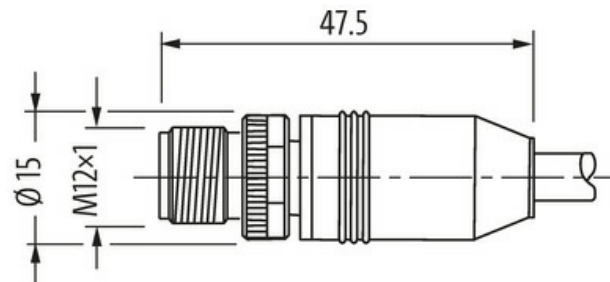



Product may differ from Image



\* only for products with UL/CSA approved cable

**Form**

Form 46041

**Technical Data**

|                                    |  |
|------------------------------------|--|
| Operating voltage                  | max. 30 V AC/DC  |
| Operating voltage (only UL listed) | 30 V AC/DC   |
| Rated surge voltage                | 0.8 kV   |
| Operating current per contact      | max. 4 A   |
| No. of poles                       | 6  |
| Material group                     | IEC 60664-1, category I  |
| Coding                             | A-coded  |
| LED display                        | no   |
| Locking of ports                   | Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing |
| Compression gland                  | M12 (SW13)   |
| Protection                         | IP65 and IP67 when plugged and screwed down (EN 60529)           |
| Material                           | PUR  |
| Locking material                   | Zinc die casting, matte nickel plated                            |

**General data**

|                            |  |
|----------------------------|--|
| Mounting method            | inserted, tightened                      |
| Material (contact)         | Copper alloy                             |
| Material (contact surface) | Au                                       |
| Material (gasket)          | FKM                                      |
| Pollution Degree           | 3  |
| Temperature range          | -25...+85 °C, depending on cable quality |

**Cables**

|                       |   |
|-----------------------|---|
| No./diameter of wires | 4× 0.5 + 2× 0.25 mm <sup>2</sup>  |
| Wire isolation        | TPE (bl, wh, br, bk), (gr, pk)  |
| C-track properties    | 5 Mio.  |
| Outer Ø               | 7.9 mm ±5%  |
| Cable identification  | 802   |
| Approval (cable)      | cRUus (AWM style 20549/10042); CE compliant   |
| Cable weight [g/m]    | 95,7 g  |
| Material (wire)       | Cu wire, bare   |
| Single wire Ø (core)  | 0.15 mm (0.5 mm <sup>2</sup> ); 0.1 mm (0.25 mm <sup>2</sup> )                                      |
| Construction (core)   | 28× 0.15 mm (0.5 mm <sup>2</sup> ); 32× 0.1 mm (0.25 mm <sup>2</sup> ); (multi-strand wire class 6) |
| Diameter (core)       | 4× 0.5 + 2× 0.25 mm <sup>2</sup>  |
| AWG                   | similar to AWG 20 (0.5 mm <sup>2</sup> ); similar to AWG 24 (0.25 mm <sup>2</sup> )                 |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

|                                 |  |
|---------------------------------|--|
| Material (wire isolation)       | TPE-E  |
| Shore hardness (wire isolation) | 55 ±5 D  |
| Wire-Ø incl. isolation          | 1.5 mm ±5% (0.5 mm <sup>2</sup> ); 1.4 mm ±5% (0.25 mm <sup>2</sup> )                                    |
| Color/numbering of wires        | (bl, wh, br, bk) + (gr, pk)  |
| Shield                          | yes  |
| optical shield cover            | min. 80%   |
| Material (jacket)               | PUR  |
| Material property (jacket)      | CFC-, halogen-, cadmium-, silicone-free, matt, low-adhesion, machine easy to process, abrasion-resistant |
| Shore hardness (jacket)         | 89 ±5 A  |
| Outer-Ø (jacket)                | 7.9 mm ±5%   |
| Color (jacket)                  | green  |
| Jacket Color                    | green  |
| Nominal voltage                 | 300 V AC   |
| Test voltage                    | 1500 V (wire/wire); 1200 V (wire/shield)   |
| Temperature range (fixed)       | -50...+80 °C   |
| Temperature range (fixed)       | -50...+80 °C   |
| Temperature range (mobile)      | -40...+80 °C   |
| Temperature range (mobile)      | -40...+80 °C   |
| Bend radius (fixed)             | 5× outer Ø   |
| Bend radius (moving)            | 10× outer Ø  |
| Bend radius (moving)            | 10× outer Ø  |
| No. of bending cycles (C-track) | max. 5 Mio. (25 °C)  |
| Travel speed (C-track)          | max. 2 m/s   |
| Torsion stress                  | ±180°/m  |
| Material (jacket)               | PUR (UL/CSA)   |

#### Commercial data

|                       |               |
|-----------------------|---------------|
| country of origin     | HU            |
| customs tariff number | 85444290      |
| EAN                   | 4048879321839 |
| eClass                | 27061801      |
| Packaging unit        | 1.000         |