

## 7/8" female 90° field-wireable

Female 90°

7/8" (5-pole)

Sealing range (cable Ø): 8...10 mm

Screw terminals

Plastic housings with good resistance against chemicals and oils.




The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link to Product](#)

#### Illustration



Female

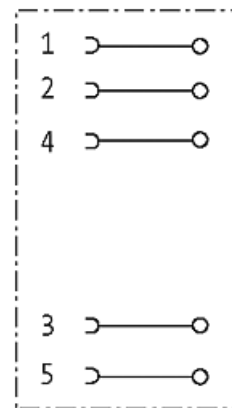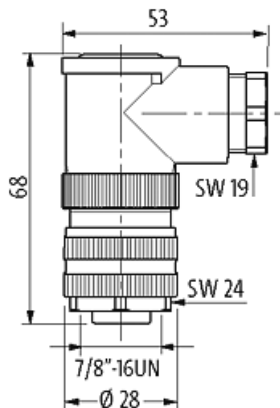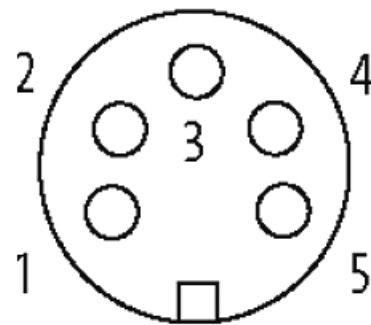

Product may differ from Image

#### Form

Form 78271

#### Technical Data

Operating voltage	max. 300 V AC/DC
Operating current per contact	max. 9 A
Connection cross section	max. 2.5 mm <sup>2</sup>
Sealing range (cable Ø)	8...10 mm
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)
Material	PBT

#### General data

Temperature range	-25...+85 °C
Material (gasket)	FKM

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879631709
eClass	27279218
Packaging unit	1