

**7/8" male 0° field-wireable**

Male straight

7/8" (5-pole)

Screw terminals




Sealing range (cable Ø): 8...10 mm

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Male

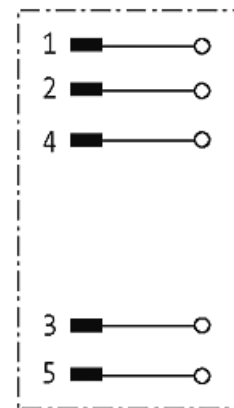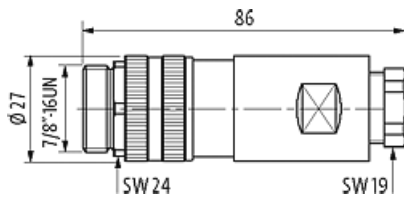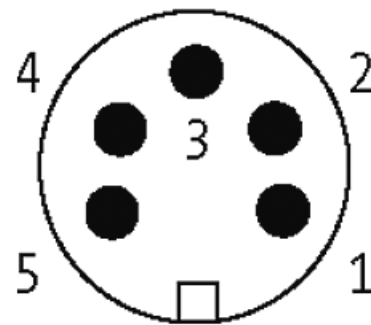

Product may differ from Image

**Form**

Form 78111

**Technical Data**

|                               |                                                             |
|-------------------------------|-------------------------------------------------------------|
| Operating voltage             | max. 300 V AC/DC                                            |
| Operating current per contact | max. 9 A                                                    |
| Connection cross section      | max. 2.5 mm <sup>2</sup>                                    |
| Sealing range (cable Ø)       | 8...10 mm                                                   |
| Locking of ports              | Screw thread 7/8" (recommended torque 1.5 Nm) self-securing |
| Protection                    | IP67 inserted and tightened (EN 60529)                      |
| Material                      | PBT                                                         |

**General data**

Temperature range -25...+85 °C

**Commercial data**

|                       |               |
|-----------------------|---------------|
| country of origin     | DE            |
| customs tariff number | 85366990      |
| EAN                   | 4048879631440 |
| eClass                | 27279218      |
| Packaging unit        | 1             |