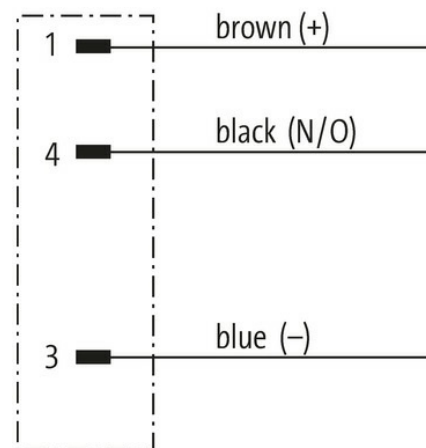




M8 MALE FLANGE PLUG 1-3-4

Wire 3x0.25 0.2m

Flange male
M8, 3-pole
Front mounting
with multi-strand wire

[Link to Product](#)**Illustration**

Male

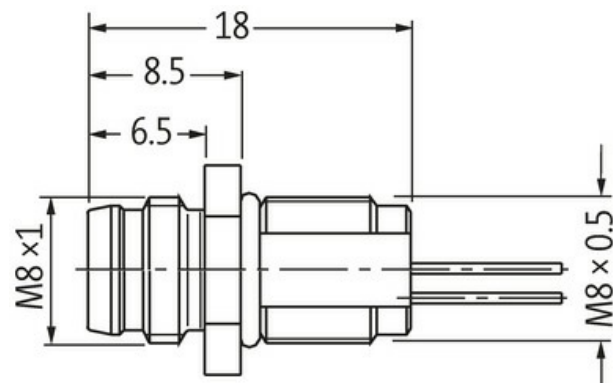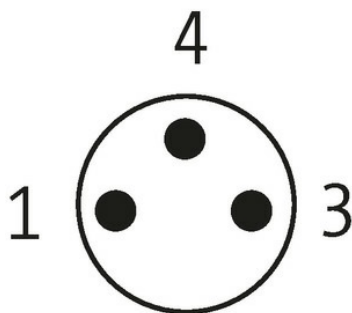

Product may differ from Image

Form

Form 08551

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M8x1 mm) recommended torque 0.4 Nm, self-securing
Protection	IP66K, IP67 inserted and tightened (EN 60529)

General data

Temperature range -25...+85 °C

Cables

No./diameter of wires	3× 0.25 mm ²
-----------------------	-------------------------

Wire isolation	PP (br, bk, bl)
----------------	-----------------

Outer Ø	1.1 mm ±5%
---------	------------

Cable number	970
--------------	-----

Temperature range (fixed)	-40...+90 °C
---------------------------	--------------

Temperature range (mobile)	-25...+90 °C
----------------------------	--------------

Bend radius (fixed)	5× outer Ø
---------------------	------------

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85444290
-----------------------	----------

EAN	4048879224581
-----	---------------

eClass	27279220
--------	----------

Packaging unit	1.000
----------------	-------