



## MTS 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 160VA IN: 230/400VAC +/- 15VAC OUT: 230VAC

Single-phase - Control and Isolation Transformers  
 160 VA  
 Isolation class T 40/B  
 Spring clamp terminals  
 Other voltages on request.

### [Link to Product](#)

#### Illustration

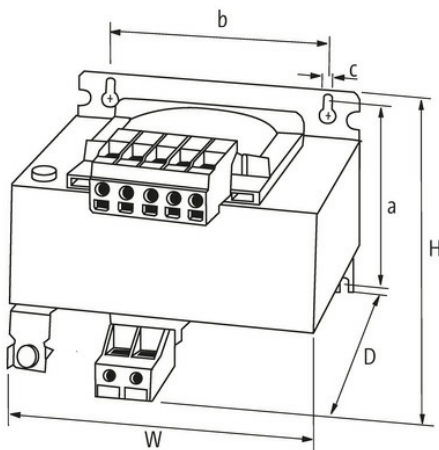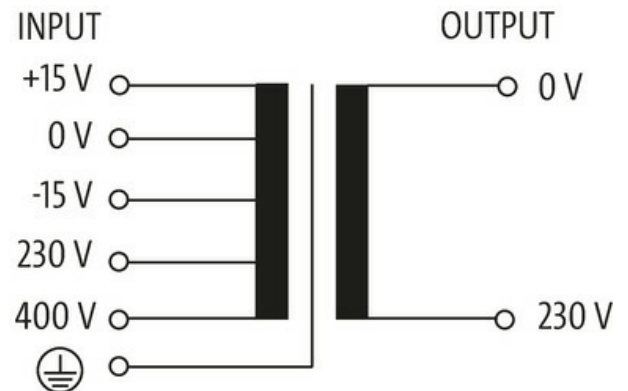

Product may differ from Image



#### General data

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	4.8x8.4 mm

Fixing centers a×b×c	86.5×84×4.8 mm
----------------------	----------------

Dimensions H×W×D	101×96×106 mm
------------------	---------------

**Output**

Output voltage	230 V AC
----------------	----------

Output rating	160 VA
---------------	--------

**Input**

Input voltage	230/400 ±15 V AC
---------------	------------------

Inrush current	6 A (230 V AC); 3.46 A (400 V AC)
----------------	-----------------------------------

Short-circuit current	9.5 A (230 V AC); 5.5 A (400 V AC)
-----------------------	------------------------------------

Input current	0.78 A (230 V AC); 0.45 A (400 V AC)
---------------	--------------------------------------

Frequency	50...60 Hz
-----------	------------

**Commercial data**

country of origin	CZ
-------------------	----

customs tariff number	85043180
-----------------------	----------

EAN	4048879065948
-----	---------------

eClass	27031302
--------	----------

Packaging unit	1.000
----------------	-------