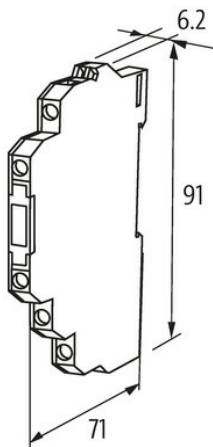
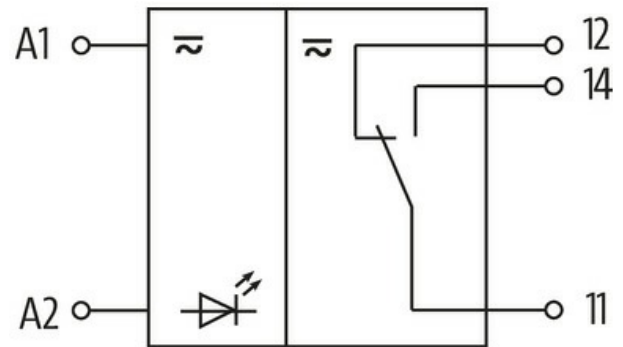


MIRO 6.2 115-1U OUTPUT RELAY WITH LEAKAGE

CURRENT SUPPRESSION

1 NO/NC contact
6 A
115 V AC/DC
Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+60 °C
Protection	IP20
Dimensions H×W×D	91×6.2×71 mm

Output

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Min. load current	100 mA
Contact material	Ag Sn O2
Switching voltage	max. 250 V AC/DC
Power rating (voltage dependent)	max. 1500 VA/120 W
Switching current per output	max. 6 A

Input

LED display	LED (green)
-------------	-------------

Utilization category

AC-15	3 A (24/110/230 V AC)
AC-12	6 A (24/110/230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)

Commercial data

country of origin	CZ
customs tariff number	85364900
EAN	4048879879774
eClass	27371001
Packaging unit	1.000