


PROFINET Managed Switch 10x10/100BT IP67 Metal M12

[Link to Product](#)


Illustration





Female



Male



Female

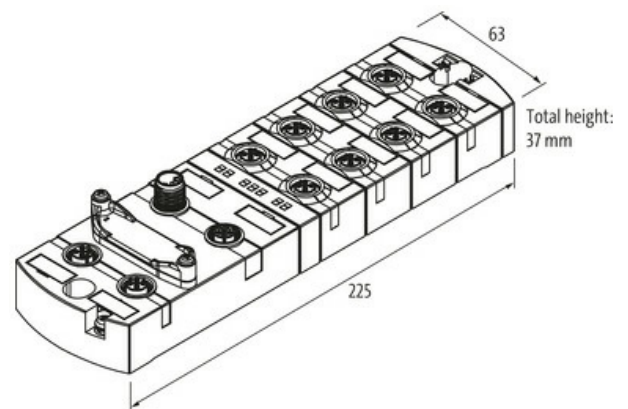

Product may differ from Image



Technical Data

Operating voltage	9...36 V
Transfer rate	10/100 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

General data

Mounting method	2-hole screw mounting
Temperature range	-25...+70 °C, ...+70 °C derating (storage temperature -40...+85 °C)
Housing	Metal
Protection	IP67
Dimensions HxWxD	37x63x225 mm

Connections

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Fieldbus	10× M12 (female), D-coded
Supply	2× M12 Power, 5-pole, L-coded, 2× max. 16 A
PROFINET	
Specification	V2.4, Conformance Class B
Addressing	DCP
FSU (Fast-Start-Up)	no
PROFINET Netload Class	III
MRP	yes
Shared Device	no
Switch Management	
Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog
NAT	yes
Port Mirroring	yes
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN
Webserver	HTTP, HTTPS
Switch Form	PROFINET - Managed Switch
Diagnostic	
Communication status	via LED, LLDP
Monitoring - no voltage	yes
Commercial data	
country of origin	DE
customs tariff number	85176200
EAN	4048879862554
Packaging unit	1.000