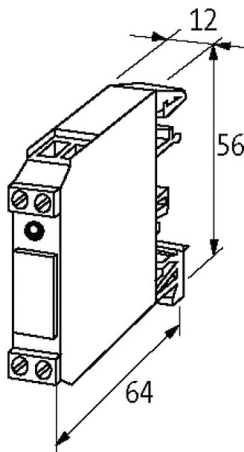
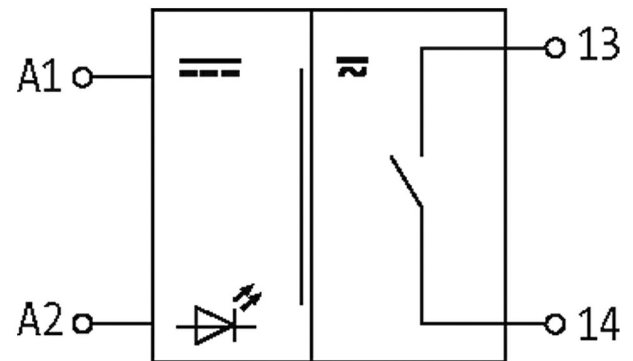


RMM 11/24 DC OUTPUT RELAY

IN: 24 VDC - OUT: 250 VAC/DC / 5 A

1 relay; 1 NO contact
 5 A
 24 V AC/DC
 Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-25...+60 °C (storage temperature -40...+80 °C)
Test isolation voltage	4.0 kV
Mech./ elect. life	20 000 000 switching cycles/load dependent

Output

Min. load current	100 mA
Contact material	Ag Ni
Energize/release/contact bounce time	20/15/2 ms
Switching voltage	max. 250 V AC/DC
Switching frequency	50...60 Hz

Power rating (voltage dependent)	max. 1250 VA/240 W
----------------------------------	--------------------

Switching current per output	max. 5 A
------------------------------	----------

Input

Connection voltage - current	24 V DC (19.2...30 V DC) - 15 mA
------------------------------	----------------------------------

LED display	LED (red)
-------------	-----------

Utilization category

AC-15	3 A (24/110/230 V AC)
-------	-----------------------

AC-1	5 A (24/110/230 V AC)
------	-----------------------

DC-13	1.5 A (24 V DC); 0.3 A (110 V DC); 0.15 A (230 V DC)
-------	--

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85364900
-----------------------	----------

EAN	4048879024822
-----	---------------

eClass	27371601
--------	----------

Packaging unit	1.000
----------------	-------