

## SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE

24V LED+Z-Diode M16x1.5




Form B (10 mm)  
24 V AC  $\pm 20\%$  / DC  $\pm 25\%$   
LED and Z-diode  
metric

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link to Product](#)

#### Illustration

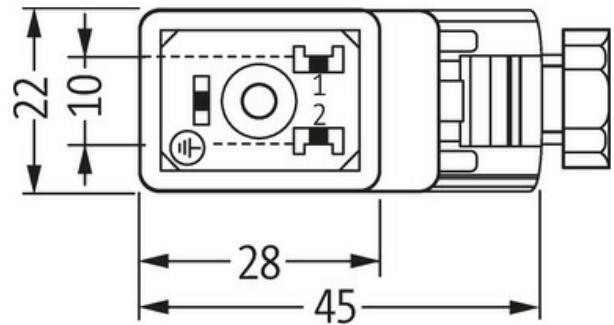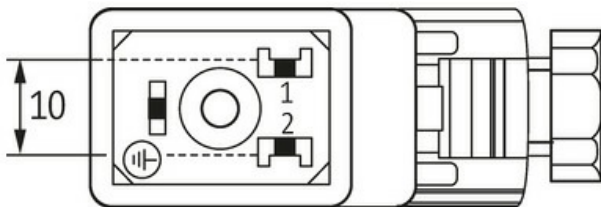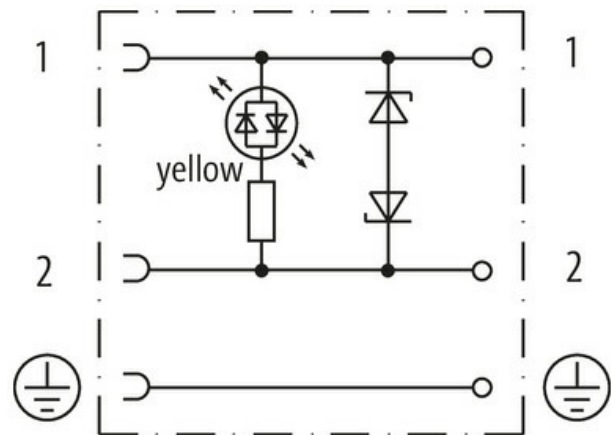

Height: 41 mm

Product may differ from Image

#### Form

Form 29561

#### Technical Data

Operating voltage	24 V AC $\pm 20\%$ / DC $\pm 25\%$
Operating current per contact	max. 4 A
Locking of ports	M3 (recommended torque 0.4 Nm)
Protection	IP65 inserted and tightened (EN 60529)
Configuration	2 contacts + PE

#### General data

Temperature range -20...+60 °C

**Commercial data**

country of origin	CZ
customs tariff number	85366990
EAN	4048879187350
eClass	27279221
Packaging unit	1.000