

MVK+MPNIO DI8 DO8 POF IRT

Push Pull galvanic separation

Digital inputs/outputs

DI8 DO8 (IRT)

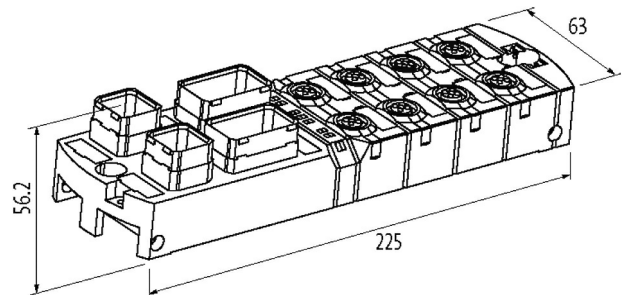
Ethernet 10/100 Mbit/s; 2× SCRJ45 POF Push Pull

Push Pull Power connector, max. 12 A

M12, 5-pole, A-coded

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

Link to Product**Illustration**

Product may differ from Image

**General data**

Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+70 °C)
Protection	IP67
Dimensions H×W×D	56.2×63×225 mm

Output

Lamp load	10 W
Actuator supply UA	24 V DC (EN 61131-2), max. 12 A
Switching current per output	max. 2 A (short-circuit and overload protected)

Input

Sensor supply US	24 V DC (EN 61131-2), max. 200 mA (M12 female), short-circuit and overload protected
Type	for 3-wire sensors or mechanical switches, PNP

Parameterization

PIN 4	Input (port 4...7); Output (port 0...3)
PIN 2	Input (port 4...7); Output (port 0...3)

Connections

Fieldbus	Ethernet 10/100 Mbit/s; 2× SCRJ45 POF Push Pull
Sensor-system/actuator supply	Push Pull Power connector, max. 12 A
I/O ports	M12, 5-pole, A-coded

PROFINET

Specification	V2.2, Conformance Class C (IRT)
Addressing	DCP

FSU (Fast-Start-Up)	max. 500 ms
PROFINET Netload Class	III
MRP	yes
Shared Device	yes, for 2 controls

Diagnostic

Communication status	via LED
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Actuator warning	per channel via LED and BUS
Further	POF - dumping/length measurement
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes
Cable break	per port

Commercial data

country of origin	DE
customs tariff number	85389099
EAN	4048879553179
eClass	27242604
Packaging unit	1.000