



## INTELLIGENT INTERFACE RELAY MODULE

RMI 11/24-230 VAC/DC, 1 C/0

1 relay; 1 NO/NC contact  
8 A  
24...230 V AC/DC  
Screw terminals

### [Link to Product](#)

#### Illustration

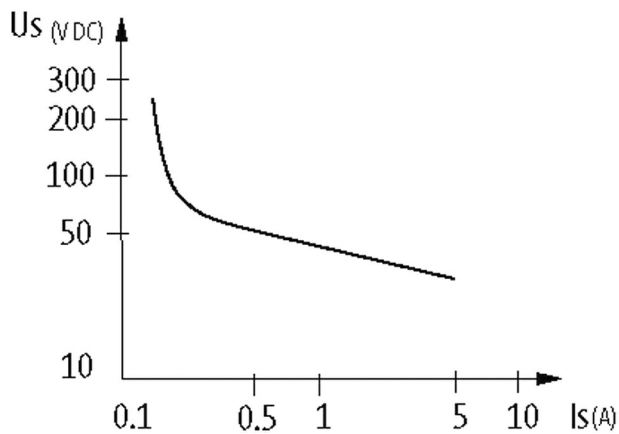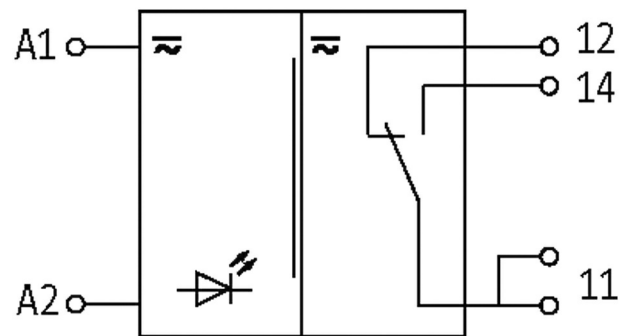

Product may differ from image

#### General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-25...+50 °C (storage temperature -40...+80 °C)
Test isolation voltage	6.0 kV
Mech./ elect. life	20 000 000 switching cycles/load dependent

#### Output

Min. load current	100 mA
Contact material	Ag Ni
Energize/release/contact bounce time	8/20/2 ms
Switching voltage	max. 250 V AC/DC
Switching frequency	max. 0.1 Hz (with load)
Power rating (voltage dependent)	max. 2000 VA/240 W

Switching current per output max. 8 A

**Input**

Connection voltage - current 24...230 V AC/DC (21.6...253 V AC/DC) - 7 mA; max. 30 mA

LED display LED (red)

**Utilization category**

AC-15 3 A (24/110/230 V AC)

AC-1 8 A (24/110/230 V AC)

DC-13 1.1 A (24 V DC); 0.15 A (110 V DC)

**Commercial data**

country of origin CZ

customs tariff number 85364900

EAN 4048879027700

eClass 27371001

Packaging unit 1.000