

7/8" MALE 0° FIELD-WIREABLE SCREW

5-pol. clamp section 6-8 mm

Male straight

7/8" (5-pole)




Screw terminals

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Male

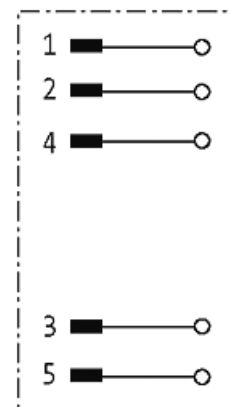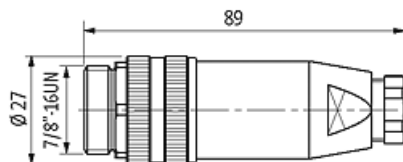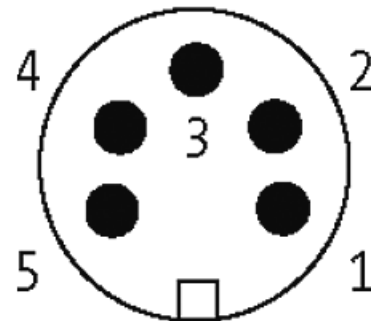

Product may differ from Image

**Form**

Form 78081

Technical Data

| | |
|-------------------------------|---|
| Operating voltage | max. 250 V AC/DC |
| Operating current per contact | max. 9 A |
| Connection cross section | max. 1.5 mm ² |
| Sealing range (cable Ø) | 6...8 mm |
| Locking of ports | Screw thread 7/8" (recommended torque 1.5 Nm) self-securing |

Protection IP67 inserted and tightened (EN 60529)

General data

Temperature range -25...+85 °C

Commercial data

| | |
|-----------------------|---------------|
| country of origin | DE |
| customs tariff number | 85366990 |
| EAN | 4048879134781 |
| eClass | 27279218 |
| Packaging unit | 1 |