

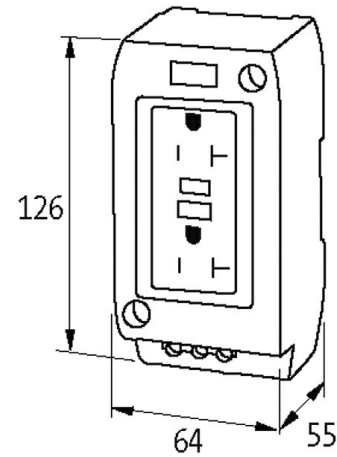
MSVD POWER SOCKET NEMA

Mounting rail

USA (2× NEMA 5-20)

Screw terminals

Each socket can be loaded with 20 A, however, the total load of both sockets must be below 30 A.

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

| | |
|-------------------|-----------|
| Operating voltage | 125 V AC |
| Operating current | max. 20 A |

General data

| | |
|------------------|---|
| Mounting method | DIN-rail mountable (EN 60715) |
| Connection | Screw terminals: max. 6 mm ² |
| Dimensions H×W×D | 126×64×55 mm |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85366990 |
| EAN | 4048879041362 |
| eClass | 27189217 |
| Packaging unit | 1.000 |