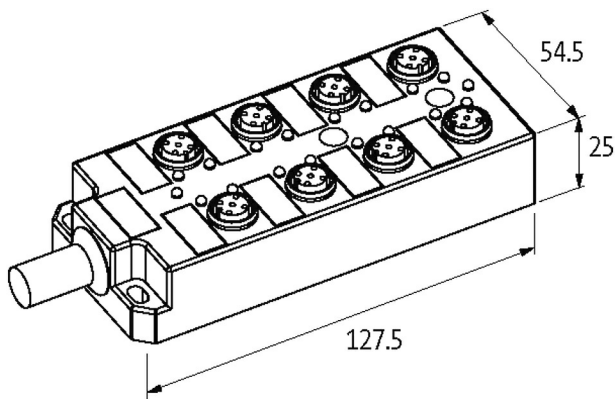
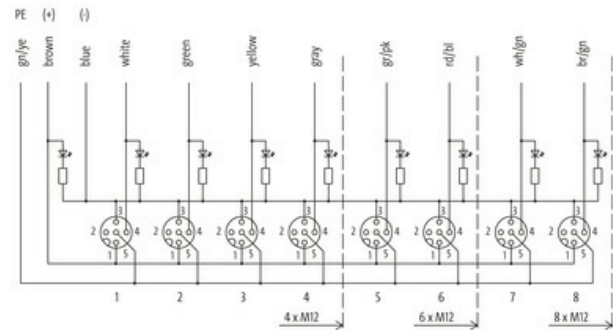
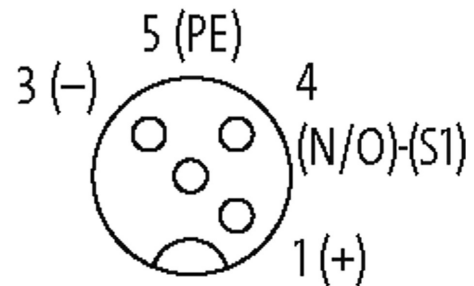


**MVP XTREME 8XM12, 4 POLE FIXED CABLE**

20m PUR, 8x0.5+3x1.0, bl halogen free UL/CSA

20.0 m

[Link to Product](#)**Illustration****M12 Females 4-pole**

Product may differ from Image

**Technical Data**

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12x1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP65, IP67, IP68
Housing	Plastic housing

**General data**

Temperature range	-30...+85 °C
-------------------	--------------

**Cables**

No./diameter of wires	8x 0.5 + 3x 1.0 mm <sup>2</sup>
C-track properties	2 Mio.
Outer Ø	8.3 mm ±5%
Cable number	445
Approval (cable)	UL (AWM-Style 20233), CSA
Jacket Color	black
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-40...+60 °C

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Torsion stress	0.5 Mio. ±180°/m
Material (jacket)	PUR (UL/CSA)

**Contact Layout**

PIN 1	(+)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)
	LED (green): Power / LED (yellow): (S1)

**Commercial data**

country of origin	CZ
customs tariff number	85444290
EAN	4048879314978
eClass	27143423
Packaging unit	1.000