


M12 FEMALE BUS TERMINATING PLUG FOR DEVICENET




DeviceNet, CANopen
Terminating resistor
Female
M12 – M12, 5-pole (circuit diagram)
A-coded

[Link to Product](#)

Illustration

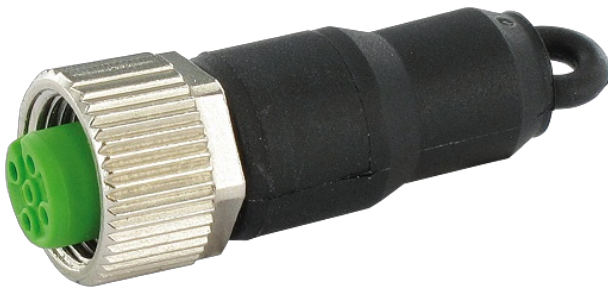

Female

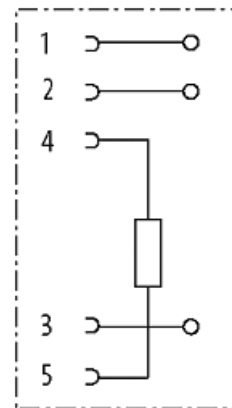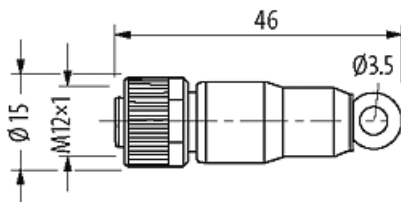

Product may differ from Image



Form

Form 13471

Technical Data

Operating voltage	max. 30 V DC
Operating voltage (only UL listed)	max. 30 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated

General data

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Temperature range -25...+85 °C

Commercial data

country of origin	DE
customs tariff number	85332100
EAN	4048879198752
eClass	19070403
Packaging unit	1