

T COUPLER M12 MALE / M12 FEMALE 0°

T-coupler

Male straight – females straight

M12 – M12, 5-pole




Parallel circuit

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

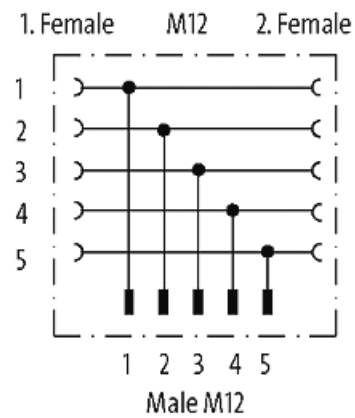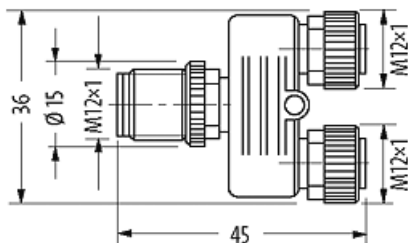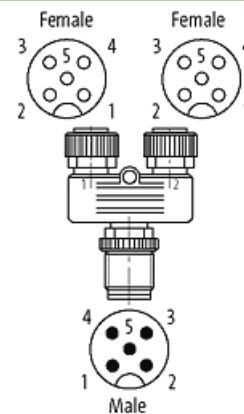

Product may differ from Image



Form

Form 41141

Technical Data

Operating voltage max. 60 V AC/DC

Operating voltage (only UL listed) 30 V AC/DC

Rated surge voltage 1.5 kV

Operating current per contact max. 4 A

Material group IEC 60664-1, category I

Locking of ports Screw thread (M12x1 mm) recommended torque 0.6 Nm, self-securing

Protection	IP67 inserted and tightened (EN 60529)
------------	--

Locking material	Zinc die casting, matte nickel plated
------------------	---------------------------------------

General data

Temperature range	-25...+85 °C
-------------------	--------------

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85366990
-----------------------	----------

EAN	4048879144841
-----	---------------

eClass	27143423
--------	----------

Packaging unit	1
----------------	---