

MODLINK MSDD DBL COMBI INSERT FRANCE WITH LED

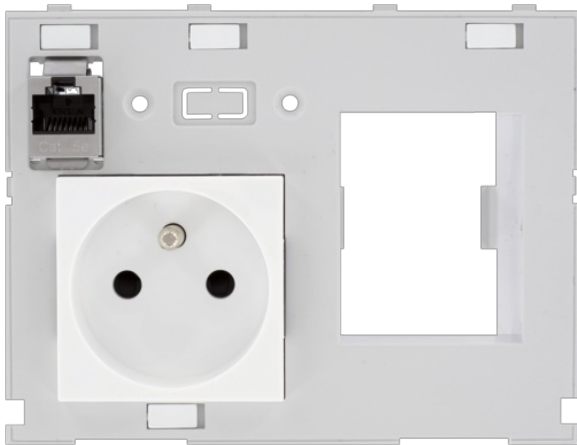
1xRJ45+USB-A + RCD opening

1× France (UTE-NF) white

1× RJ45, 8-pole metal, CAT5e (female/female)

1× FI cut-out

1× USB 3.0 (female/female) form A

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Dimensions H×W×D 88×116×70 mm

RJ45

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

USB

Operating current	1.5 A
Specification	USB: 3.0 (max. 5 Gbit/s)
Locking of ports	Snap In
Operating voltage	48 V AC/DC
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC

France (UTE-NF)

Connection	Spring clamp terminals: max. 2× 2.5 mm ² (AWG 14)
Operating current	10...16 A
No. of poles	2 + PE
Operating voltage	250 V AC

Shielding plate

Tightening torque	0.9 Nm ±0.1
Connection	Threaded hole M4

Commercial data

country of origin FR

customs tariff number	85366990
EAN	4048879862295
Packaging unit	1.000