
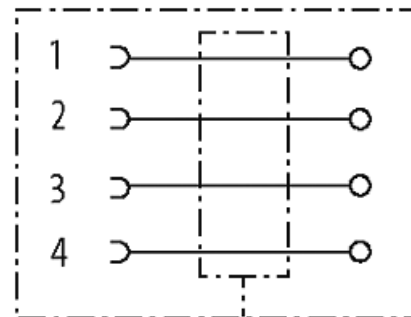
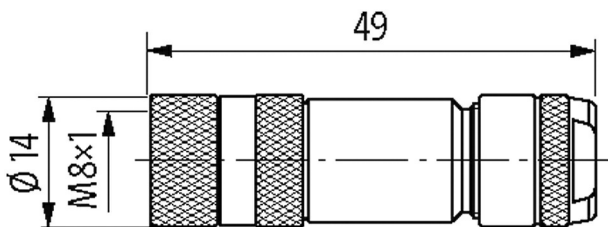


M8 FEMALE 0° SHIELDED WIREABLE SCREW TERM.4-pol. 0,14...0.5mm²

Female straight
M8, 4-pole
shielded
Screw terminals
Connection cross section: 0.14...0.5 mm²

[Link to Product](#)**Illustration**

Female

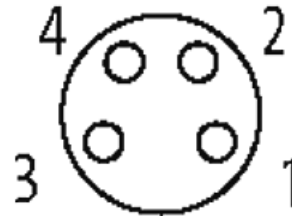

Product may differ from Image

Form

Form 08671

Technical Data

Operating voltage	max. 60 V
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
Material group	III
Connection cross section	0.14...0.5 mm ²
Sealing range (cable Ø)	4...5.5 mm
Protection	IP67 inserted and tightened (EN 60529)
Over voltage category	III

General data

Pollution Degree	3
Temperature range	-40...+85 °C
Material (contact)	Gold plated bronze

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Dimensions H×W×D 49×14×14 mm

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879224468
eClass	27279221
Packaging unit	1